



▶ See page


<b>Statement of Line</b>	4.2
<b>Planning</b>	4.12
Tools	4.12
Technology Mangement	4.13
Monitor Arms	4.14
Power/Data Systems	4.15
LED Lights	4.23
<b>Pricing</b>	4.25
Tools	4.25
Technology Mangement	4.40
Power/Data Systems	4.60
LED Lights	4.65
<b>Surface Materials</b>	4.67
Wood	4.67
Laminate	4.68
Paint	4.69
Fabric and Upholstery	4.70

## Tools

Statement of Line

### Metal Work Tools

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67




#### Paper Tray

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.25 to specify.




#### Personal Shelf

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.25 to specify.




#### Phone Shelf

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.25 to specify.




#### Dry-Erase Markerboard with Tray

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.25 to specify.




#### Cup Holder

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.25 to specify.




#### Picture Frames

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.25 to specify.



#### Name Plate

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.26 to specify.



#### Pendaflex Folder Holder

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.26 to specify.



#### Ear Phone/Bud Holder

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.26 to specify.



#### Slant Sorter

For use with:

- Metal slat tiles
- Load bars
- Wall-mounted Traxx
- Xsite Traxx


➤ See page 4.26 to specify.

## Tools

Statement of Line

Metal Work Tools, continued

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



### Vertical Sorter

For use with:


- Metal slat tiles
  - Load bars
  - Wall-mounted Traxx
  - Xsite Traxx
- See page 4.26 to specify.



### Shelf

For use with:


- Metal slat tiles
  - Load bars
- See page 4.27 to specify.



### Side Trays

For use with:

- Metal slat tiles
  - Load bars
- See page 4.27 to specify.



### Pocket Organizer

For use with:

- Metal slat tiles
  - Load bars
  - Wall-mounted Traxx
  - Xsite Traxx
- See page 4.27 to specify.



### Slant Sorter with Chrome Dividers

For use with:


- Metal slat tiles
  - Load bars
- See page 4.27 to specify.



### Binder Shelf

For use with:


- Metal slat tiles
  - Load bars
  - Wall-mounted Traxx
  - Xsite Traxx
- See page 4.27 to specify.



### CD Holder

For use with:

- Metal slat tiles
  - Load bars
  - Wall-mounted Traxx
  - Xsite Traxx
- See page 4.28 to specify.



### Hanging File Holder

For use with:


- Metal slat tiles
  - Load bars
  - Wall-mounted Traxx
  - Xsite Traxx
- See page 4.28 to specify.



### Memo Tray

For use with:


- Metal slat tiles
  - Load bars
  - Wall-mounted Traxx
  - Xsite Traxx
- See page 4.28 to specify.



### Pencil Tray

For use with:


- Metal slat tiles
  - Load bars
  - Wall-mounted Traxx
  - Xsite Traxx
- See page 4.28 to specify.



### Note Poster

For use with:


- Metal slat tiles
  - Wall-mounted Traxx
  - Xsite Traxx
- See page 4.28 to specify.



### Load Bars

For use with:

- Cetra or Interworks EQ panels
  - Wall brackets
- See page 4.29 to specify.



### Wall Brackets

For use with:

- Load bars
- See page 4.29 to specify.

## Tools

Statement of Line

### Plastic Work Tools

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



#### Accessory Dish

For use with:

- Slat tiles
- Wall-mounted Traxx

➤ See page 4.30 to specify.



#### Utility Tray

For use with:

- Slat tiles
- Wall-mounted Traxx

➤ See page 4.30 to specify.




#### Binder Shelf

For use with:

- Slat tiles
- Wall-mounted Traxx

➤ See page 4.30 to specify.



#### Shelf

For use with:

- Slat tiles
- Wall-mounted Traxx

➤ See page 4.30 to specify.



#### Pencil Cup

For use with:

- Slat tiles
- Wall-mounted Traxx

➤ See page 4.30 to specify.




#### Phone Holder

For use with:

- Slat tiles
- Wall-mounted Traxx

➤ See page 4.31 to specify.




#### Paper Trays

For use with:

- Slat tiles
- Wall-mounted Traxx

➤ See page 4.31 to specify.




#### Slant Sorter

For use with:

- Slat tiles
- Wall-mounted Traxx

➤ See page 4.31 to specify.



#### Accessory Tray

For use with:

- Slat tiles
- Wall-mounted Traxx

➤ See page 4.31 to specify.




#### File Pocket

For use with:

- Slat tiles
- Wall-mounted Traxx
- Xsite storage tiles
- Xsite tip-out drawers
- Standard file drawers

➤ See page 4.32 to specify.



#### Photo/Document Display

For use with:

- Slat tiles
- Wall-mounted Traxx
- Xsite Traxx

➤ See page 4.32 to specify.



## Tools


Statement of Line

### Organizational Tools


Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



**Carousel Center Drawer**  
➤ See page 4.33 to specify.




**Carousel Tray**  
➤ See page 4.33 to specify.




**Center Drawer**  
➤ See page 4.33 to specify.




**Wood Center Drawer**  
Available in paint and wood finishes.  
➤ See page 4.33 to specify.




**Pencil Tray**  
➤ See page 4.33 to specify.



**Drawer Organizer**  
➤ See page 4.33 to specify.



**Box Drawer Dividers**  
➤ See page 4.34 to specify.




**Overhead/Shelf Dividers**  
➤ See page 4.34 to specify.




**CD Holder**  
➤ See page 4.34 to specify.




**Coat Hook**  
➤ See page 4.34 to specify.




**Utility Hook**  
➤ See page 4.34 to specify.



**Front-to-Back File Bars**  
➤ See page 4.35 to specify.




**Side-to-Side File Bars**  
➤ See page 4.35 to specify.




**Side-to-Side Surface Dividers**  
➤ See page 4.36 to specify.

Collaboration Tools


Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



**Wall-Mount Tackboards**  
➤ See page 4.37 to specify.




**Wall-Mount Markerboards**  
➤ See page 4.37 to specify.




**Hanging Markerboard Tile**  
➤ See page 4.37 to specify.



**Name/Sign Holder**  
➤ See page 4.37 to specify.




**Mobile Screens**  
Available in fabric, translucent, and markerboard models.  
➤ See page 4.38 to specify.



**Visual Boards with or without Molding**  
➤ See page 4.39 to specify.


Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



### Single-Monitor Arms

Select slat, clamp, grommet/  
bolt-through, or Xsede accessory rail  
mount.


- See page 4.14 for product info.
- See page 4.40 to specify.



### Dual-Monitor Arms

Select clamp or grommet/bolt-through  
mount model with crossbar, or M-Flex  
clamp mount model.


- See page 4.14 for product info.
- See page 4.40 to specify.



### Adjustable Keyboard Kits


Available in manual or intuitive  
adjusting models.

- See page 4.41 to specify.



### Sit-to-Stand Keyboard Kit

- See page 4.41 to specify.



### Keyboard Adjusters

- See page 4.41 to specify.




### Wood Keyboard Drawer

- See page 4.42 to specify.




### Keyboard Trays

- See page 4.42 to specify.




### Corner Sleeve

- See page 4.42 to specify.



### Hanging CPU Holder

- See page 4.43 to specify.




### Mobile CPU Cart

- See page 4.43 to specify.



### Laptop/Equipment Lock


- See page 4.43 to specify.



### Grommets

Available in metal, plastic, and  
desktop through-mount models.


- See pages 4.44 and 4.45 to specify.



### Vertical Cable Managers


Available in expandable, flexchain,  
and adhesive-style models.

- See page 4.46 to specify.



### Horizontal Cable Managers


- See page 4.47 to specify.



### Wire Manager Fillers

- See page 4.48 to specify.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



**Ashley Duo™ Clamp-Mount Power/USB Center**  
➤ See page 4.49 to specify.



**Clamp-On Power Module**  
➤ See page 4.49 to specify.



**Clamp-On Voice/Data Module**  
➤ See page 4.49 to specify.




**Surface-Mount Power/USB Center**  
➤ See page 4.50 to specify.




**Power Module**  
➤ See page 4.50 to specify.




**Voice/Data Module**  
➤ See page 4.50 to specify.




**Salt USB Unit**  
➤ See page 4.51 to specify.




**Pepper Power Unit**  
➤ See page 4.51 to specify.




**Node® Power Center**  
➤ See page 4.51 to specify.




**Node® Power/USB Center**  
➤ See page 4.51 to specify.




**Pull-Up Power/USB Grommet**  
➤ See page 4.52 to specify.




**Retractable Power/Communication Center**  
➤ See page 4.52 to specify.



**Power/Communication Grommet**  
➤ See page 4.52 to specify.




**Single-Sided Pneumatic Pop-Up Power/Data Centers**  
➤ See page 4.53 to specify.




**Power/Data Center**  
➤ See page 4.53 to specify.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67




**Power/Data Center**

➤ See page 4.53 to specify.




**Ashley Duo™ Power/USB Center**

➤ See page 4.54 to specify.




**Ashley Trio™ Power/Data/USB Center**

➤ See page 4.54 to specify.




**Axil Z Power/USB/Bluetooth Center**

➤ See page 4.54 to specify.



**Mho® Retractable Power/Data and Power/Data/USB Centers**

➤ See page 4.55 to specify.




**Vault Turnbox Power/USB Center**

➤ See page 4.56 to specify.




**Vault Turnbox Power/Data/USB Center**

➤ See page 4.56 to specify.




**M2X Double-Sided Pneumatic Pop-Up Power/Data/USB Centers**

➤ See page 4.57 to specify.




**M2X Retractable Power/Data Center and Power/Data/USB/HDMI/VGA Center**

➤ See page 4.57 to specify.




**Mho® 2X Power/Data/USB Center**

➤ See page 4.57 to specify.




**E2X Power/Data Center**

➤ See page 4.58 to specify.




**40" Rectangular Power/Data Center**

➤ See page 4.58 to specify.




**Mini-Tap® Undersurface Power Unit**

➤ See page 4.59 to specify.



**Mini-Tap® Undersurface Power/USB Unit**


➤ See page 4.59 to specify.



**Power Outlet Strip**


➤ See page 4.59 to specify.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67




### Power/Data Drawers

- See page 4.15 for power/data systems overview.
- See page 4.60 to specify.




### Single-Circuit Electrical Components

- See page 4.15 for power/data systems overview.
- See page 4.61 to specify.



### Four-Circuit (8-Wire) Electrical Components

- See page 4.15 for power/data systems overview.
- See page 4.62 for power entries.
- See page 4.63 for power components.



### Hardwire Components

- See page 4.15 for power/data systems overview.
- See page 4.64 to specify.




Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67




**Freestanding LED Lights**

- See page 4.23 for product info.
- See page 4.65 to specify.




**Surface-Mount LED Lights**

- See page 4.23 for product info.
- See page 4.65 to specify.



**Under-Cabinet LED Lights**

- See page 4.23 for product info.
- See page 4.65 to specify.




**Task Lights**

- See page 4.66 to specify.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

**Name/sign holders** are available for an aesthetically pleasing method of identifying and personalizing your workspace.

**Coat hook** helps keep your workspace clear for more usable space.

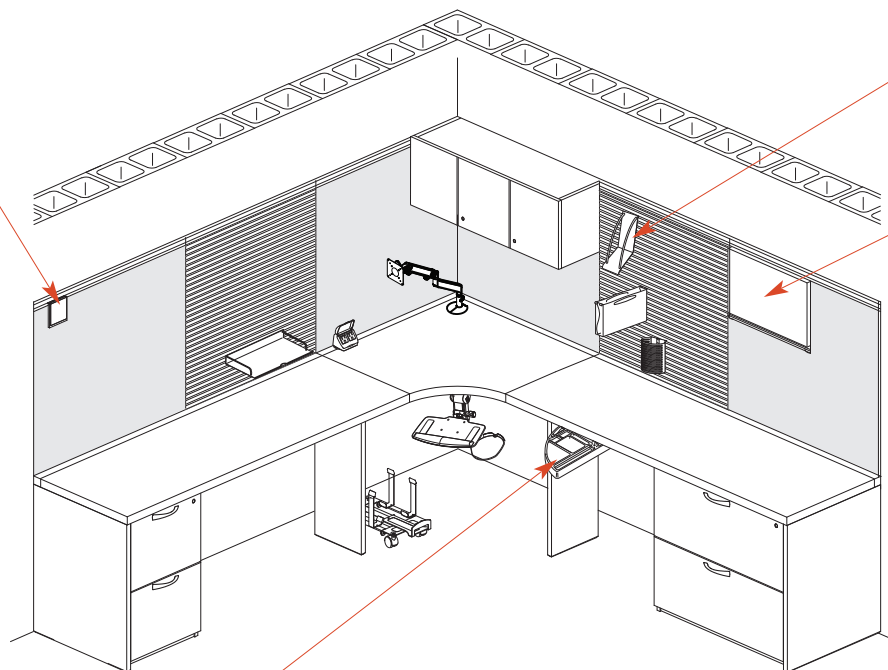


**Work tools**, available in metal or plastic, provide storage up off of the worksurface.

**Hanging markerboard tile** hangs from Xsite Traxx, metal slat tiles, or lower mobile table screens. It can be moved easily around the workspace to keep the creativity flowing.

**Organizational tools**, such as pencil trays and drawer organizers, provide more functionality to storage units.

**Carousel trays and center drawers** provide convenient undersurface storage. Carousel trays rotate 360°.

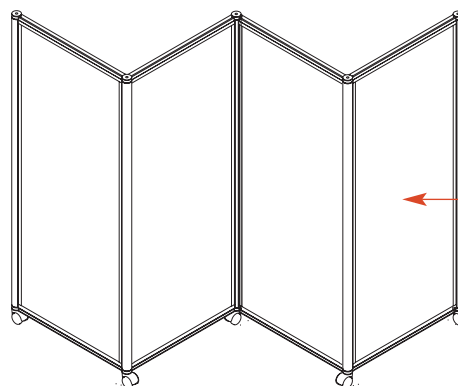


**Mobile screens** provide visual privacy and divide space.

**Power and voice/data modules** provide convenient access to power and data on the worksurface. Modules slip securely into worksurface wire manager; no field scribing is necessary and they may be relocated as needed.

**Keyboard kits, adjusters, or trays** attach below the surface to provide adjustability and storage for computer keyboards.

**Wire manager fillers** provide a finished end to wire manager at the end of a worksurface.

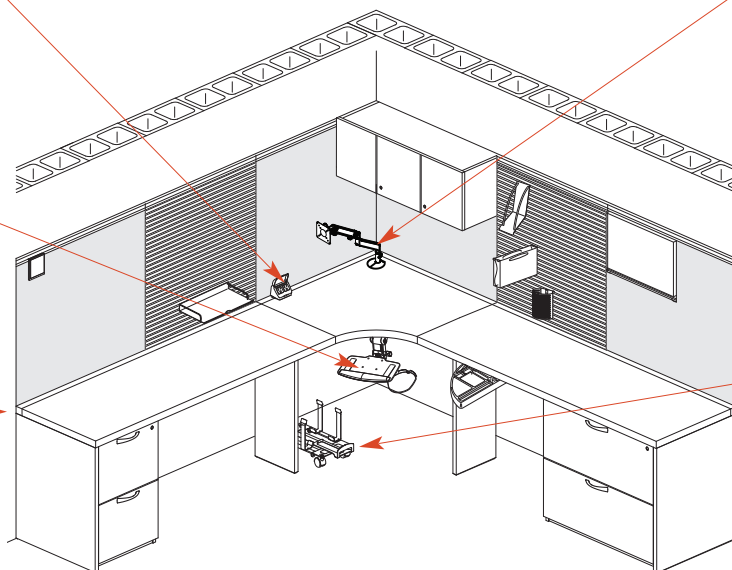


**Monitor arms** can be positioned at optimum height and distance to minimize strain and fatigue, preventing discomfort and injury.


**Grommets** are available for field installation to allow cords and cables to pass through the worksurface. ▶ See the applicable price list for factory-installed grommets.

**Mobile CPU cart** provides easy access to the back of your unit. It automatically adjusts to support CPUs up to 9"W. It adds 3¾" to the height of the installed CPU.


## Flexchain Data Area

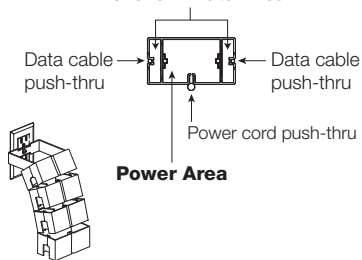

**Flexchain** manages cables and power-in feeds from under the surface to the floor. Flexchain U-bracket, specified separately, mounts to a standard wall outlet to manage cords from the outlet to under the surface. Flexchain has a center area for electrical cords and power in-feeds, and two side areas for data cables.




**Undersurface cable manager** is available to manage cords and cables under the worksurface. Cables pressure fit between loops.



**Single-sided pneumatic pop-up power/data centers** provide convenient access to power and USB ports at worksurface height. Field scribing of surface is required.



**Expandable cable manager** provides cable management from under the worksurface to the floor. It is ideal for use with height-adjustable tables.



**Wireless presentation systems** are available. ▶ See the Presentation Systems chapter in the *Kimball Meeting & Collaboration Price List*.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

## Adjustable Keyboard Kits:

Keyboard kits cannot be used with President and Senator kneespace credenzas due to the central locking mechanism; nor can they be used with Scenario tables and Fluent worksurfaces as they interfere with the support channels.

Keyboard kits can be used with Xsede when undersurface support rails are not used.

Only keyboard kit models 99K1706KK2 and 99K1706KK1 work with Priority support rails and height-adjustable tables. Keyboard mount slide will need to be oriented parallel with the front edge of the worksurface. To store, lower the keyboard and swing under the surface.

The following adjustable keyboard kit models comply with ANSI/HFES method 2.

Series	Keyboard Arm Model
Priority™	99K2208KK1 99K2319KKS1
Definition®	99K2208KK1 99K2319KKS1
Transcend®	99K2208KK1 99K2319KKS1
Footprint®	99K2319KKS1

For use in corner applications.


## Monitor Arms

Planning


### Single and Dual

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67


#### Details



Single



Dual  
(with crossbar)



Dual M/flex

**Monitor arms in this collection feature 4D adjustment**, adjusting in and out, up and down, swiveling left and right, and tilting back and forward.


#### Arm with integrated cable management

reach is 20" on single models and dual M/Flex models; 22" on dual crossbar models. Height adjustment range is 10" on single models and dual M/flex models; and 11½" on dual crossbar models.


**Monitors up to 20 lbs.** can be accommodated:

- Single-monitor arm supports one monitor between 4–20 lbs.
- Dual M/Flex model supports two monitors between 4–20 lbs. each. Each arm adjusts independently of the other for the greatest versatility.
- Dual-monitor arm supports two monitors from 8–20 lbs. each and features a crossbar design with Allen head screws to keep monitors secure in public areas.


*Note: Dual-arm crossbar monitors must have two monitors attached at all times for balance.*



Slat



Clamp  
for Xsede



Grommet/  
Bolt-Thru



Accessory Rail

**Single-monitor arms** are available in slat-mount, clamp-mount, grommet/bolt-through, and Xsede accessory rail models.



Clamp



Clamp  
for Xsede



Grommet/  
Bolt-Thru

**Dual-monitor arms** are available in clamp-mount and grommet/bolt-through models. Dual-monitor arms with cross bar can be used for a single-monitor application; however, the cross bar would be exposed.



Clamp


**M/flex dual-monitor arms** are available as a clamp-mount model.

**100mm x 100mm VESA plates** are standard. A 75mm x 75mm plate can be accommodated. The standard VESA plates are not compatible with Apple monitors.

➤ Contact Apple Computer directly to purchase an appropriate VESA plate separately.

#### Connections

**IMPORTANT:** Monitor mounts are specific to arm style and are not interchangeable between single- and dual-monitor applications.




#### Slat-mount single-monitor arms are for use on metal slat tiles.


The number of single-monitor arms per slat tile is limited:

- Wall-mounted, full, metal slat tiles accommodate one monitor arm per tile. Trim channels included with the slat tile must be used.
- 24" or 30"W Cetra slat tiles accommodate one monitor arm per tile.
- 18", 24", or 30"W 1-high or 2-high Xsite slat tiles accommodate one monitor arm per tile. 2-high Xsite slat tiles require an extra mid-frame support for stability, specified separately. Trim channels included with the slat tile must be used.
- Xsite technology tile can hold two monitors per tile.
- Priority slat or fabric/slat tiles will accommodate two monitor arms if spaced at least 24" apart.
- Xsede slat tiles will accommodate two monitor arms if spaced at least 24" apart.

**Slat-mount model** cannot be used on wall-mounted Traxx, wall-mounted fabric/slat tiles, or Xsite Traxx.



**Clamp-mount models** must be mounted on the straight edge of a 1¾" or 1⅞" worksurface; they are not applicable for knife, reverse knife, and sloped edge profile surfaces. When using on wire manager worksurfaces, the hard plastic underneath will have to be notched so the clamp is flush to a straight edge. The flexible topside durometer will bend.  
*Note: Clamp-mount models compatible with Xsede can be mounted to the back of the worksurface.*



**Grommet/bolt-through models** can be used in holes up to 2.3" in diameter. They cannot be placed over a pedestal, modesty panel, or support panel. They can be used with 1¾" or 1⅞" worksurfaces. Bolt-through application can utilize a hole as small as ½" in the surface.

➤ Refer to assembly instructions at [www.kimball.com](http://www.kimball.com).


**Power/data drawers and electrical components** are for use in open planning and freestanding applications. They are recommended for use with Priority™, Definition®, Fluent® (where modesty panel is not used), and Foot-print®.

**Perks power/data sliding drawer** brings both power and data to the underside of the worksurface. Unlike fixed troughs or baskets, the drawer pulls out to allow routing of excess cabling once the initial connection has been made.

**Mounting hardware** is field installed.

**Metal knock-outs** in the front face and back of the drawer can be removed as needed for data or electrical outlets.

**Single-circuit, four-circuit, and hardwire electrical components** are for use in power/data drawers.

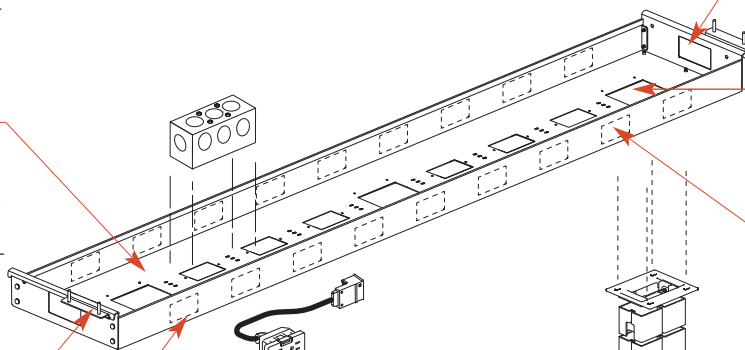

**Cut-outs** on the ends (sides) of the drawer allow jumpers to exit for connection inside the next drawer.


**Large cut-outs** on the bottom of the drawer allow power in-feed to enter the drawer.

**Data/telecommunication modules** can be used in the power/data drawer bottom cut-outs or the knock-outs on the front or back of the drawer.

**Data cables** can also be routed in the drawer to service the workstation.

**Flexchain (shown) or expandable cable manager** manages cables from under the surface to the floor.

**IMPORTANT:** Flexchain, expandable, vertical, and undersurface cable managers are required to protect four-circuit (8-wire) components from physical damage.

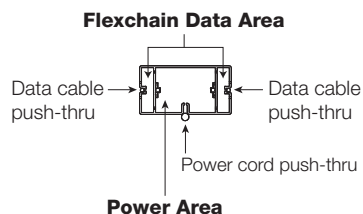

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Circuitry Options:

Power/data drawers accept single-circuit or four-circuit electrical components. Components are specific to either single or multi-circuit; they cannot be used interchangeably. Power/data drawers are U.L. listed.




Single-circuit components access power from a standard wall or floor electrical outlet. This flexible, non-sequential, daisy-chaining system allows power to be distributed to a maximum of eight duplex receptacles per power in-feed.  
➤ See page 4.18 for application guidelines.

Four-circuit components combine to form an 8-wire, 4-circuit, power system.  
➤ See page 4.19 for application guidelines.


Hardwire components are also available to allow field hardwiring of power within the power/data drawer where required by local codes.  
➤ See page 4.22 for application guidelines.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

## Details



**Power/data drawer** is a powder-coated metal tray that mounts to the underside of a worksurface using two bent sheet metal drawer slides.

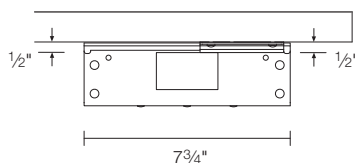

**1/2" gap** between the worksurface and the front and back edges of the drawer allows cords to exit. Cut-outs in the sides allow cables to pass to adjacent drawers.

➤ See next page for knock-out and cut-out details.

**Holes centered in the floor** of the power/data drawer are provided to attach Perks laptop/equipment lock (model 99KLTK).

## Planning Factors


**Power/data drawers** are for use in open plan and freestanding applications. Recommended for use with Priority, Definition, Fluent, and Footprint. They are designed to work with 24", 30" and 36"W worksurfaces in single or back-to-back configurations.

**Specify drawer size** based on the width of the surface to which it will attach. Specify the drawer to be 10" shorter than the worksurface width to allow for it to mount inboard of the surface support. For example, specify a 62"W drawer for a 72"W worksurface. If using a surface with storage, base your calculation on the unsupported surface dimension to determine drawer size.


**90° and 120° corner worksurfaces** can accommodate a power/data drawer. Specify model 99K26PDD for use with a 90° corner support frame; specify model 99K26PDD or 99K32PDD, for use with 120° corner support frame.

**Power/data drawers** are not intended for use against a wall or in conjunction with Systems panels.


**In single worksurface applications**, the power/data drawer should be inset 1" from the back of the worksurface.



**Factory-installed grommets** in worksurfaces are located so excess cabling will fall directly into the drawer.

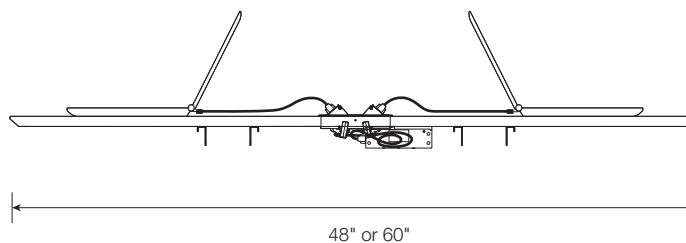


drawer.





**On 48" and 60"D worksurfaces** (depicted above), power/data drawer can be located so that when the drawer is extended, it is located on the centerline of the surfaces. Both the 10" rectangular power/data center (KCU0810ELPDC) and the 40" rectangular power/data center (KCU0840ELPDC) will work in conjunction with the power/data drawer in this application.


*Note: Not applicable for all surface widths due to interference with support legs.*



**Depending on user electrical needs**, one drawer can be shared in back-to-back configurations. Some users may require an individual




**Power/data center** (99KPDCAM) may be mounted (recessed) on 36"D worksurfaces with a power/data drawer.




**Use of a power/data center on a 24" or 30"D surface** in conjunction with single power/data drawer is not possible due to clearance.

*Note: Use two smaller power/data drawers on a single worksurface to allow power/data center, clamp-mounted accessories, or through-grommet accessories to extend below the surface between the power/data drawers.*



**When using wire manager worksurfaces in back-to-back configurations**, the power/data drawer can be shared between the users depending on user electrical needs. It should align with the wire manager. The drawer can extend forward to store the excess cabling under the wire manager.



**Modesty panel must be located behind the power/data drawer** to allow the drawer to extend forward toward the approach side of the worksurface for cable access.




## Power/Data Drawers

Planning

### Knock-Out and Cut-Out Locations

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



**Knock-outs** in the front and back of the drawer are compatible with industry-standard data faceplates, such as Tyco/Amp, Panduit, ECA and Hubbell. Individual knockouts are 1 $\frac{3}{8}$ " x 2 $\frac{11}{16}$ ". Data and telecommunication modules are the responsibility of the user. Knock-outs are located 6" on center. Distance between knockouts is 3 $\frac{1}{4}$ ".

**Pre-punched cut-outs** are located in the floor of the drawer and are sized similarly to knock-outs as described above. Use these cut-outs for hardwire applications. Receptacles placed in the drawer bottom cut-outs must be installed facing the floor.

Surface Width	Drawer Width	Model Number	Front & Back Knock-Outs	Small Bottom Cut-Outs	Flexchain Cut-Outs
36"	26"	99K26PDD	3	2	1
42"	32"	99K32PDD	5	2	3
48"	38"	99K38PDD	5	2	3
54"	44"	99K44PDD	7	4	3
60"	50"	99K50PDD	7	4	3
66"	56"	99K56PDD	9	6	3
72"	62"	99K62PDD	9	6	3
78"	68"	99K68PDD	11	8	3
84"	74"	99K74PDD	11	8	3
90"	80"	99K80PDD	13	10	3
96"	86"	99K86PDD	13	10	3

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

## Details

**Single-circuit components access power from a standard wall or floor electrical outlet.** This flexible, non-sequential, daisy-chaining system allows power to be distributed to a maximum of eight duplex receptacles per power in-feed.

**The following components comprise the single-circuit system:**

- Power in-feed
- Duplex receptacles with an attached 12" modular feed
- 12", 24", 48", 74", 96" and 120" jumper cables

**Power in-feed** is a 10' cord with a "smart box" that monitors the number of receptacles connected. The system will automatically shut off if more than eight receptacles are plugged into the power in-feed. One end of the cord features a three-prong plug that plugs into a standard 110 volt, 15 amp wall or floor outlet.

**For ease in installation,** jumper cables feature a squeeze-latch connector and will only plug in one way.

**Duplex receptacles** snap into the power/data drawer. Receptacles feature a 12" modular feed with a double-out interface. Power is brought to the receptacle by a power in-feed or jumper cable. Power is passed to adjacent components by a jumper cable, forming a daisychain.

## Planning Factors

**When planning jumper cable lengths** to connect two adjacent power/data drawers, calculate that an additional 24" of the cable is required inside the drawers (12" per drawer) to make connection to the receptacles' modular feeds.

**For jumping between receptacles inside** a power/data drawer, 12" jumpers are recommended for drawers that are 50"W or smaller; 24" jumpers are for 56"W and wider drawers.

**In 120° applications,** 24" jumper cables can be used to jump from one power/data drawer to another.

**Jumpers must be secured every 24"** when spanning under the work-surfaces.

**This system should not be plugged into a GFCI outlet receptacle.** The single-circuit system contains an overload breaker, and the sensing circuit in the "smart box" can affect the sensitivity of a GFCI power feed, causing the GFCI duplex receptacle to trip.


## Related Products



**Single-circuit mini-adapt power module** features an 18" modular feed with a double-over interface. The unit contains two receptacles for power access at the worksurface. A hand-tightened clamp on the back of the unit allows flexibility for positioning it at the back of the worksurface.

**48" jumper cables** can be used to connect one power/data drawer to another. They can span over one 15"W pedestal with spacers.

**74", 96", and 120" jumpers** are for use when spanning over Priority storage with spacers.

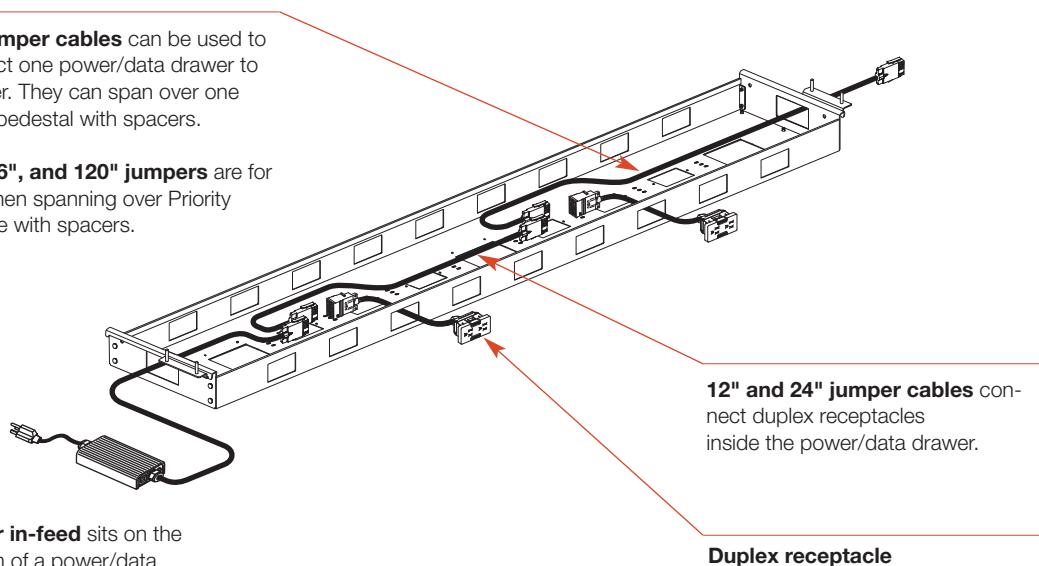

**Power in-feed** sits on the bottom of a power/data drawer.

## Power/Data Drawers:

Power/data drawers accept single-circuit or four-circuit electrical components. Components are specific to either single or multi-circuit; they cannot be used interchangeably. ➤ See page 4.16.

## Approval/Compliance:

All Perks single-circuit components are U.L. 962 Listed and comply with the National Electrical Code (NEC). Consult a qualified electrical contractor or engineer for proper installation of electrical equipment. *Note: Any field modification of the electrical components voids the UL listing.*

## Recommended Receptacles:

Drawer Model	Recommended No. of Receptacles
99K**PDD	
26	2
32	4
38	4
44	4
50	6
56	8*
62	8*
68	8*
74	8*
80	8*
86	8*

\*Limited by circuit availability.

### Details

The following components combine to form an 8-wire, four-circuit system:

- Hardwire power in-feeds (two options) or ceiling power entry
- Power distribution assemblies
- Duplex receptacles
- Jumper cables

For ease in installation, the connectors will only plug in one way.

There are three ways to bring power to the system:

- 10' floor/wall power in-feed;
- Modular wall starter and modular 10' power in-feed; or
- 12' ceiling power in-feed

IMPORTANT: Power in-feeds entering the power/data drawer from the floor or wall must be secured/ protected by a flexchain, expandable cable manager, vertical cable manager, or secured to the legs.



**Floor/wall power in-feed** features a 10' liquid tight conduit with a pigtail on one end that must be wired by a licensed electrician to a wall or floor-mounted junction box. The other end features a single squeeze-latch connector to attach to a power distribution assembly.



**Modular wall power in-feed** features a 10' modular conduit with a squeeze-latch connector on each end. One end must connect to modular wall starter, specified separately, the other end connects to a power distribution assembly. Modular wall starter must be wired to building power by licensed electrician.

*Note: This modular power in-feed option allows you to unplug the cable from the wall and store away when not in use.*



**Ceiling power in-feed** features a 12' flexible, galvanized metal conduit with a pigtail on one end that must be wired by a licensed electrician to a junction box in the ceiling. The other end features a single squeeze-latch connector to attach to a power distribution assembly.




**Power/data flexible ceiling pole** is available to conceal ceiling power in-feed and other data cables. Pole is a flexible, metal conduit. Outer diameter of pole is 2 1/8"; inner diameter is 2".

**Ceiling power pole** can be field installed on Priority center-mount shelf on stanchions. Power can be routed between tiles to the bottom of the worksurface.

Jumper cable

Floor or wall power in-feed

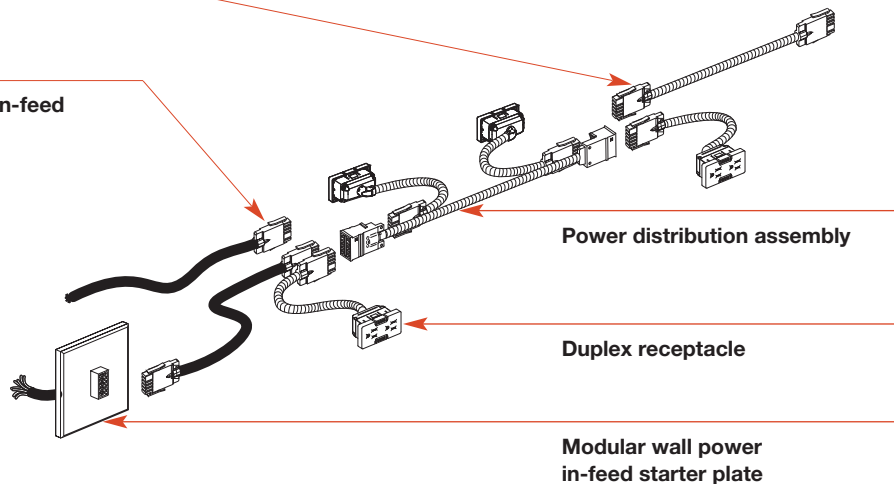

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Power/Data Drawers:

Power/data drawers accept single-circuit or four-circuit electrical components. Components are specific to either single or multi-circuit; they cannot be used interchangeably.  
➤ See page 4.16.

### Approval/Compliance:

All Perks four-circuit components are U.L. 1286 Listed and comply with the National Electrical Code (NEC). Consult a qualified electrical contractor or engineer for proper installation of electrical equipment.  
*Note: Any field modification of the electrical components voids the UL listing.*


### Receptacles:

Drawer Model 99K**PDD	Recommended No. of Receptacles
26	2
32	2
38	2
44	2
50	4
56	4
62	4
68	4-6
74	4-6
80	4-6
86	4-6


## Four-Circuit (8-Wire) Power System

Planning


continued



**Trim plates** can be specified for field installation to conceal the intersection of the flexible ceiling pole at the ceiling and work surface.



**Power distribution assembly** supplies power for four duplex receptacles within a power/data drawer. Power distribution assemblies are 36" long.



**Duplex receptacles** feature a 12" flexible, metal conduit and a single squeeze-latch connector to attach it to the power distribution assembly.

**Receptacles models are numbered 1, 2, 3, 4, or 5** to correspond to the circuit to which they will provide access.



**Jumper cables** feature a squeeze-latch connector on each end and are available in 24", 36", 48", 74", 96" and 120" widths. Jumpers are encased in a flexible, galvanized metal conduit.

**Use 24" and 36" jumper cables** inside the power/data drawer to connect power distribution assemblies and duplex receptacles.

**When planning jumper cable lengths** to connect two adjacent power/data drawers, calculate that an additional 24" of the cable is required inside the drawers (12" per drawer) to make connection to the receptacles' modular feeds.




**Use 48" jumper cables** to connect a two power/data drawers on adjacent surfaces. 48" jumpers may also be used to span over one Priority 15"W pedestal with spacers.

**78", 96", and 120" jumpers** are for use when spanning over Priority storage with spacers.

**Jumpers must be secured every 24"** when spanning under the work surfaces.

### Wiring Schematics:

The 8-wire, multi-circuit configuration provides up to four circuits. Ideally a 4-wire, WYE, 208 volt service provides the best utilization.

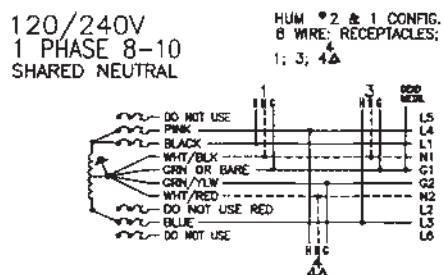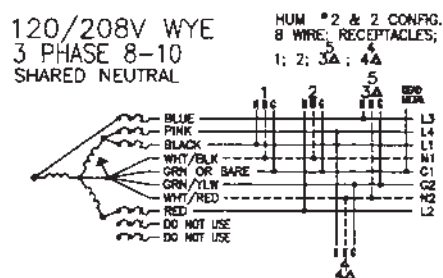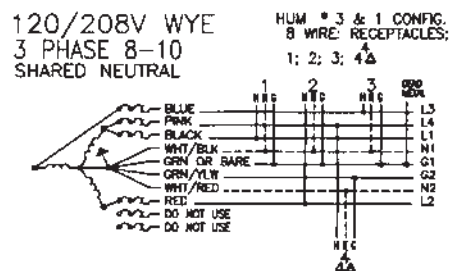

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Planning & Installation:

**IMPORTANT:** Planning actual power supplies and branch circuits must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

Installations should be in accordance with the NEC. Local codes may vary. Consult a qualified electrical contractor or engineer for proper installation of electrical equipment. Hardware necessary for installation is shipped with all components.

continued

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Planning Factors

**Two wiring configurations** are possible—3 and 1 or 2 and 2—utilizing the same components.

➤ See wiring configurations at right.


**Duplex receptacles** used for both types of wiring configurations are the same. This simplifies specifications and allows a faster understanding of the system.

➤ See page 4.18 for receptacle recommendations for single-circuit applications.

➤ See page 4.19 for receptacle recommendations for four-circuit applications.

**A maximum of 13 duplex receptacles** can be accommodated per circuit.

### 3 and 1 (8-wire):

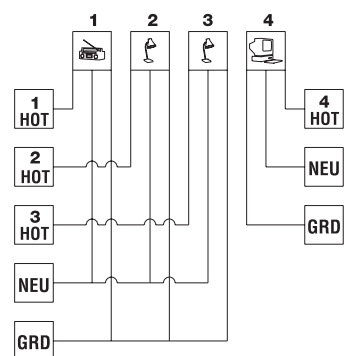


- Three utility circuits share a neutral and common ground.
- One circuit with a DEDICATED hot, neutral and ground.
- Utilize receptacles #1, 2, 3 for utility and #4 for the DEDICATED ground circuit.

Circuits 1, 2, and 3 can be used for general electrical needs. Customarily, one or more of the circuits is reserved for lighting or other everyday uses, which allows control by central or master switching.

Circuit 4 consists of three separate conductors (hot, neutral, and ground) and meets the BIFMA/ANSI definition for a dedicated circuit.

### 2 and 2 (8-wire):

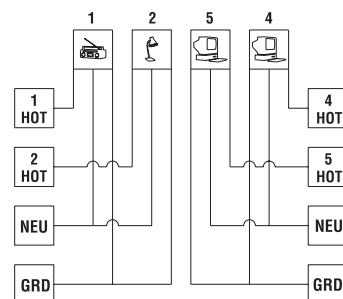

- Two DESIGNATED utility circuits and two DESIGNATED computer circuits.
- Utilize receptacles #1 and #2 for the designated utility circuits and receptacles #4 and #5 for the designated computer circuits.

*Note: Receptacle #3 cannot be used in the 2 and 2 configuration. If receptacle #3 is used, possible cross feed or interference from utility circuits one and two can be introduced to computer circuits.*

Circuits 1 and 2 provide a pair of designated circuits for general electrical needs, as described for the 3 & 1.

Circuits 4 and 5 provide a pair of designated circuits for computer applications.

### Related Products

➤ See page 4.16 for power/data drawer details.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67


## City of Chicago:

The City of Chicago requires that an electrician hardwire the electrical components to the furniture. The electrician can install hardwire boxes into the bottom of the power/data drawer utilizing the pre-punched rectangular cut-outs. Holes for attaching the duplex to the hardwire box are also provided.

Hardwired receptacles must be placed in the drawer bottom knock-outs and be installed facing the floor.

**Hardwire box (99KPBH)**

**Flexible galvanized metal conduit** is recommended so that the power/data drawer can still be extended for excess cable storage.

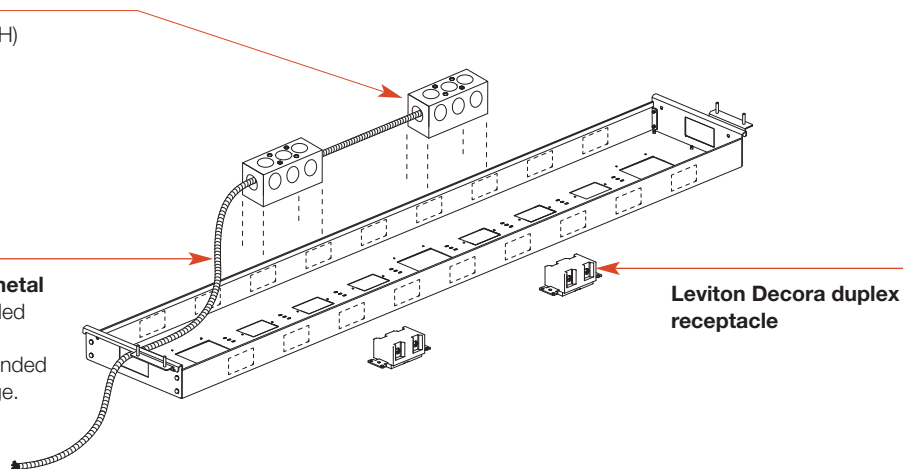


**Leviton Decora duplex receptacle**

## City of New York:

The City of New York requires that an electrician make the connection from the floor entry to the modular electrical system. The electrician can wire the floor/wall power in-feed hardwire boxes into the bottom of the power/data drawer using the pre-punched rectangular cut-outs. Power entry for NYC (model 99KP4FPFNYC) includes a modular floor/wall power in-feed, hardwire box and lid, 2' galvanized metal conduit to encase the power in-feed (not shown), and cover plate.

**New York box lid**

**New York box**

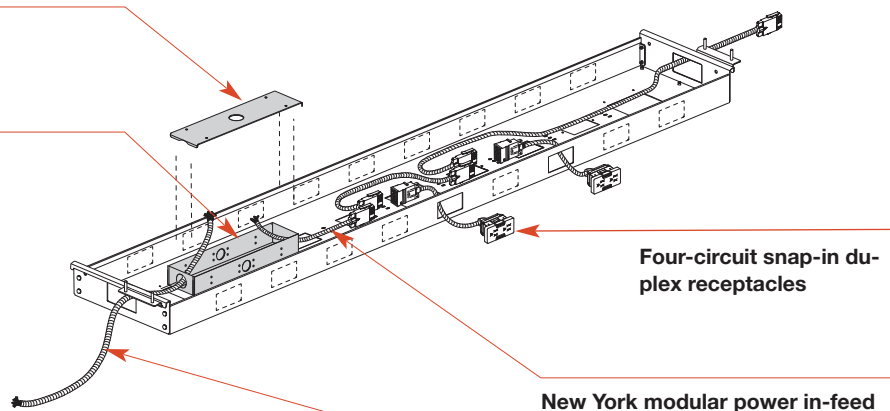

**Four-circuit snap-in duplex receptacles**

**New York modular power in-feed**

**Galvanized metal conduit** provided by electrical contractor

## Planning & Installation:

**IMPORTANT:** Planning actual power supplies and branch circuits must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

Installations should be in accordance with the NEC. Local codes may vary. Consult a qualified electrical contractor or engineer for proper installation of electrical equipment. Hardware necessary for installation is shipped with all components.

Hardwire components are also available to allow field hardwiring of power within the power/data drawer where required by local codes.




## LED Lights


Planning

### Freestanding and Surface-Mount Lights


#### Details




**Freestanding LED light** includes touch sensor switch on the head of the lamp. Push the red switch to turn on light. Hold the switch down and the light will dim to its lowest cycle and then start to brighten again. Release the switch when the light intensity is at the desired level.




**Arm on freestanding light** swivels 350°.



**Hinge on freestanding light** allows light to be turned straight up.



**Head on freestanding light** rotates 360° allowing the light to be directed to any angle.



**Surface-mount LED light** is field installed. Available for use with surfaces from 3/4" to 1 9/16" thick. The on/off touch switch is incorporated into the light.



**Head on surface-mount light** rotates 360° allowing the light to be directed to any angle.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67


- 3-year warranty
- 50,000 hour LED life
- U.L. listed power supply
- Mercury, lead and UV free
- Kelvin—3500K

## LED Lights

Planning

### Under-Cabinet Lights

#### Details




**LED lights** are a low-profile, linear solution for overhead cabinets, highback organizers, and shelves. LED lights provide a 3300K color temperature and consume less power; rated at 50,000 life hours. They utilize the latest technology for high light output with nearly no heat production. LEDs do not produce UV emissions.


**Number of LED lights** varies by fixture width:

16"W models include 56 LEDs  
24"W models include 104 LEDs  
30"W models include 132 LEDs  
62"W models include 264 LEDs


**All units** feature a silver aluminum finish and a toggle switch. 62"W models have two toggle switches.




**16", 24", and 30"W standard LED light fixtures** include a 6' cord with an  $3\frac{1}{4}$ "W x  $1\frac{1}{2}$ "D x  $1\frac{1}{2}$ "H plug featuring a built-in UL1310 class II power supply. Standard models plug directly into power receptacle; they cannot be daisy chained.



**62"W standard LED light fixture** includes a two-piece 12' cord with an in-line  $4\frac{1}{8}$ "W x  $1\frac{1}{4}$ "D x  $1\frac{3}{4}$ "H UL1310 class II power supply. 62"W standard models cannot be daisy chained.

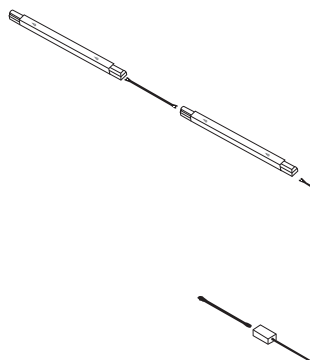

**Daisy chain application** requires a starter unit and is limited to 2 add-on units (3 fixtures total) per power source. A combination of fixture widths can be combined to obtain the desired length.



**Daisy chain starter unit** includes the fixture, a two-piece 12' cord with an in-line  $4\frac{1}{8}$ "W x  $1\frac{1}{4}$ "D x  $1\frac{3}{4}$ "H UL1310 class II power supply, two 6' interconnect cords (black), and two jumper pins.

**Black power cords** are removable and can be plugged into either end of the fixture.



**Daisy chain add-on units** do not include a power supply or cords and must be used in conjunction with a starter unit.


**Mounting requirements, cord lengths, and cord access restrictions** vary according to local standards. Consult local codes prior to specifying.

**Meets California Title 24.**

**Assembled in the USA.**

#### Connections

**Magnetic mounting concealed inside the fixture** allows attachment to the underside of Fluent highback support assemblies and metal overhead storage cabinets.



**Woods screws** are included for attaching fixtures to wood highback organizers and overhead storage.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

## Metal Work Tools

Pricing

GSA SIN 711-8

D	H	W	Model	Price
---	---	---	-------	-------

### Paper Tray

9½"	1¾"	13"	99K0913PTP	\$125
-----	-----	-----	------------	-------

### Personal Shelf

5¼"	1¾"	13"	99K0513PSP	\$125
-----	-----	-----	------------	-------

### Phone Shelf

4"	1¾"	7½"	99K0407PSP	\$119
----	-----	-----	------------	-------

### Dry-Erase Markerboard with Tray







12 <sup>9</sup> / <sub>32</sub> "	11 <sup>27</sup> / <sub>64</sub> "	8 <sup>21</sup> / <sub>64</sub> "	99K0811DMP	\$124
-----------------------------------	------------------------------------	-----------------------------------	------------	-------

### Cup Holder

4¼"	3 <sup>5</sup> / <sub>8</sub> "	3"	99K0404CHP	\$92
-----	---------------------------------	----	------------	------

### Picture Frame

5 <sup>5</sup> / <sub>6</sub> "	7¼"	5½"	99K0507PFP	\$104
5 <sup>5</sup> / <sub>6</sub> "	10¼"	8½"	99K0810PFP	111



Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Metal work tool: paint

### How to Specify

- ① Model
- ② Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD21** = Group 21 (+10%)
- ③ Finish designator

## Metal Work Tools

Pricing

continued

GSA SIN 711-8

<i>D</i>	<i>H</i>	<i>W</i>	<i>Model</i>	<i>Price</i>
<b>Name Plate</b>				
9"	1"		<b>99K0109NPP</b>	\$131

<b>Pendaflex Folder Holders</b> (set of 2)				
1"	2¼"		<b>99K0102PFHP</b>	\$78

<b>Phone/Ear Bud Holder</b>				
1"	1"	1½"	<b>99KEPHP</b>	\$49

<b>Slant Sorter</b>				
9"	1⅜"	13"	<b>99K0912SSP</b>	\$126

<b>Vertical Sorter</b>				
1⅜"	9"	13"	<b>99K0913VSP</b>	\$142

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Metal work tool: paint

### How to Specify

- ① Model
- ② Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD21** = Group 21 (+10%)
- ③ Finish designator




## Metal Work Tools

Pricing

continued

GSA SIN 711-8

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Shelf</b>				
9 1/8"	24"	2 1/4"	<b>99K0924SHM</b>	\$125
	30"		<b>99K0930SHM</b>	140
	36"		<b>99K0936SHM</b>	160
	42"		<b>99K0942SHM</b>	181
	48"		<b>99K0948SHM</b>	206
<b>Single Side Tray</b>				
11 5/8"	17"	2 3/8"	<b>99K1217SPTM</b>	\$116
<b>Double Side Tray</b>				
11 5/8"	17"	5"	<b>99K1217DPTM</b>	\$158
<b>Single Pocket Organizer</b>				
1 1/8"	15 5/8"	7 1/4"	<b>99K16POM</b>	\$96
<b>Slant Sorter With Chrome Dividers</b>				
11 3/4"	12"	7 3/4"	<b>99K1212SSM</b>	\$116
<b>Binder Shelf</b>				
9 1/8"	5"	8 1/16"	<b>99K0905SHBM</b>	\$71



Pocket organizers can be stacked vertically up to 5 units.

Recommended uses are specific for each metal work tool model; refer to the statement of line.

➤ See page 4.2.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Metal work tool: paint
- Dividers on slant sorter: chrome

### How to Specify





- ① Model
- ② Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)
- ③ Finish designator

## Metal Work Tools

Pricing

continued

GSA SIN 711-8



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>CD Holder</b>				
3 <sup>9</sup> / <sub>16</sub> "	3 <sup>15</sup> / <sub>16</sub> "	8 <sup>3</sup> / <sub>4</sub> "	99K0409CDHM	\$139
<b>Hanging File Holder</b>				
3 <sup>5</sup> / <sub>16</sub> "	12 <sup>7</sup> / <sub>16</sub> "	8 <sup>3</sup> / <sub>16</sub> "	99K0312HFH	\$114
<b>Memo Tray</b>				
5"	7"	1"	99K0507BXB	\$81
<b>Pencil Tray</b>				
5"	10"	1"	99K0510PT	\$81
<b>Note Poster</b>				
7 <sup>7</sup> / <sub>8</sub> "	18"	12 <sup>7</sup> / <sub>32</sub> "	99K0118NP2	\$68

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- CD Holder: paint; accommodates up to 12 CDs, DVDs, or Zip disks
- Hanging file folder: 6 paint colors (see below)
- Memo tray and pencil tray: black paint

### How to Specify

#### CD Holder

- ① Model
- ② Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)
- ③ Finish designator

#### Hanging File Holder

- ① Model
- ② Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)
- ③ Finish designator:  
**405** = Designer White  
**462** = Cinder  
**480** = Antique White  
**501** = Platinum Metallic  
**514** = Carbon Metallic  
**544** = Silver Pearl

#### Memo Tray, Pencil Tray, Note Poster

- ① Model



Recommended uses are specific for each metal work tool model; refer to the statement of line.  
➤ See page 4.2.



## Metal Work Tools

Pricing

continued



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Load Bars for Use with Metal Work Tools</b>				
3/4"	30"	3 3/4"	<b>99K30LBM</b>	\$76
	36"		<b>99K36LBM</b>	84
	42"		<b>99K42LBM</b>	91
	48"		<b>99K48LBM</b>	111
	54"		<b>99K54LBM</b>	119
	60"		<b>99K60LBM</b>	125
<b>Wall Brackets for Load Bars (set of 2)</b>				
3/4"	2 1/2"	4"	<b>99KLBBR</b>	\$29

Load bars are for use on Cetra or Interworks EQ panels. They can also be wall mounted using wall brackets, specified separately.

Load bars can span one or more panels that equal the width of the load bar.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Load bars or wall brackets: paint

### How to Specify

#### Load Bars

- ① Model
- ② Application:  
**C** = Cetra  
**I** = Interworks EQ
- ③ Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)
- ④ Finish designator

#### Wall Brackets

- ① Model
- ② Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)
- ③ Finish designator

## Plastic Work Tools

Pricing

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67




<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Accessory Dish</b>				
6"	6"	1 1/8"	<b>99K0606ADC</b>	\$35



<b>Utility Tray</b>				
6 3/16"	9 1/8"	1 5/16"	<b>99K0609UTC</b>	\$40



<b>Binder Shelf</b>				
10 1/2"	5"	9"	<b>99K1105SHB</b>	\$51



<b>Shelf</b>				
7"	24"	2"	<b>99K0724SHB</b>	\$112



<b>Pencil Cup</b>				
3 1/2"	4"	4"	<b>99KCP</b>	\$39

### Standard Includes

- Accessory dish, and utility tray: clear plastic
- Utility tray, binder shelf, and shelf: black plastic
- Pencil cup: clear or black plastic

### How to Specify

#### Pencil cup

- 1 Model
- 2 Plastic color:  
**B** = Black  
**C** = Clear

#### All others

- 1 Model

Plastic work tools on this page are for use with:

- Slat Tiles
- Wall-mounted Traxx

*Note: They are not recommended for use on Xsite Traxx or load bars.*





## Plastic Work Tools

Pricing

continued

GSA SIN 711-8

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Phone Holder</b>				
9½"	8½"	2"	<b>99KPH</b>	\$54
<b>Letter-Size Paper Tray</b>				
14"	9¾"	2"	<b>99K149LTPT</b>	\$59
<b>Legal-Size Paper Tray</b>				
10½"	15"	2"	<b>99K1115LPT</b>	\$62
<b>Slant Sorter</b>				
12½"	7"	7½"	<b>99KSS</b>	\$63
<b>Accessory Tray</b>				
9¾"	10½"	2"	<b>99KAC</b>	\$54



Plastic work tools on this page are for use with:

- Slat Tiles
- Wall-mounted Traxx

*Note: They are not recommended for use on Xsite Traxx or load bars.*

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Work tool: black or clear plastic


### How to Specify

- 1 Model
- 2 Plastic color:  
**B** = Black  
**C** = Clear

## Plastic Work Tools

Pricing

continued



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
----------	----------	----------	--------------	--------------

### File Pocket

13/4"	113/4"	91/4"	<b>99KFTP</b>	\$22
-------	--------	-------	---------------	------

(interior dimensions)

### Photo/Document Displays

8 <sup>15</sup> / <sub>16</sub> "	12"	<b>99K0912PDD</b>	\$39
11 <sup>7</sup> / <sub>16</sub> "	12"	<b>99K1212PDD</b>	39
17 <sup>5</sup> / <sub>8</sub> "	12"	<b>99K1812PDD</b>	43

File pockets may be used with:

- Slat tiles
- Wall-mounted Traxx
- Xsite storage tiles
- Xsite tip-out drawers
- Standard letter-size file drawers

Photo/document displays may be used with:

- Metal slat tiles
- Wall-mounted Traxx
- Xsite Traxx

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- File pocket: frosty white
- Photo/document display: clear acrylic

### How to Specify

- ① Model

## Organizational Tools

Pricing

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Carousel center drawer: clear plastic
- Carousel tray, plastic center drawer, and pencil trays: black plastic
- Wood center drawer: paint or wood finishes
- Drawer organizer includes dispensers for tape and sticky notes: black plastic

### How to Specify

#### Wood Center Drawer

- 1 Model
- 2 **W** = Wood  
**P** = Paint
- 3 Finish price group:  
**STD** = Group 1
- 4 Finish designator

#### All Others

- 1 Model

D	W	H	Model	Planning Factors	Price
<b>Carousel Center Drawer</b>					
8¼"	13⅝"	1⅜"	<b>99K0817CDR</b>	Rotates 360°. 8¼" front-to-back and 13⅝" side-to-side clearance required.	\$67
<b>Carousel Tray</b>					
15¼"	23¾"	1¾"	<b>99K1624CT</b>	Rotates 360°. 16" front-to-back and 24" side-to-side clearance required.	\$109
<b>Plastic Center Drawer (non-locking)</b>					
19⅜"	22"	2"	<b>99K1922CD</b>	Cannot be used under a 24"D worksurface when using a recessed modesty panel.	\$68
<b>Wood Center Drawer (non-locking)</b>					
22⅝"	24"	2⅜"	<b>99K2424CD</b>	For use with Footprint components. Center drawers cannot be used under a 24"D worksurface when using a modesty panel. Interior drawer dimensions: 13⅞"D x 18¾"W.	\$248
<b>Pencil Trays</b>					
<i>For Use in 15"W Footprint® Pedestals and Hum. Minds at Work.® Pedestals</i>					
5½"	12"	1⅞"	<b>99K0612PT</b>		\$22
<i>For Use in 15"W Transcend®, Fluent®, and Definition® Pedestals</i>					
4⅞"	11⅞"	1⅞"	<b>99K0512PT</b>		\$22
<i>For Use in 18"W Transcend®, Footprint®, Fluent®, and Definition® Pedestals</i>					
5½"	15"	1⅞"	<b>99K0515PT</b>		\$28
<b>Drawer Organizer</b>					
11¾"	10½"	1⅝"	<b>99K1211DO</b>	Fits any letter-width box or file drawer. When expanded, organizer fits most legal-width drawers or 18"D lateral file drawers.	\$97

➤ See the applicable price list for series-specific center drawers.

## Organizational Tools

Pricing

continued

D	W	H	Model	Planning Factors	Price
<b>Box Drawer Dividers</b>					
<i>For Use in Footprint® Flat Profile and Hum Box Drawers</i>					
12 <sup>5</sup> / <sub>8</sub> "	3 <sup>3</sup> / <sub>16</sub> "		<b>99K1303DD</b>		\$14
<i>For Use in Footprint Square Profile Box Drawers and Priority 18"W Pedestals</i>					
14 <sup>1</sup> / <sub>4</sub> "	2 <sup>1</sup> / <sub>2</sub> "		<b>99K1402DD</b>		\$14
<i>For Use in Footprint Radius Profile Box Drawers</i>					
12"	2 <sup>1</sup> / <sub>2</sub> "		<b>99K1202DD</b>		\$14
<b>Overhead/Shelf Dividers</b> (set of 3)					
6"	9 <sup>1</sup> / <sub>4</sub> "	7"	<b>99K9SD</b>		\$69
<b>CD Holder</b>					
5 <sup>1</sup> / <sub>2</sub> "	12 <sup>5</sup> / <sub>8</sub> "	6 <sup>1</sup> / <sub>2</sub> "	<b>99KFDCDH</b>	Holds 24 cases. For use in a drawer.	\$32
<b>Coat Hook</b>					
1 <sup>1</sup> / <sub>4</sub> " dia.			<b>99KCH</b>	Works with Xsite® Traxx®, slat tiles, wall-mount Traxx, Cetra®, and Interworks® EQ. Use of coat hook with slat tiles requires the removal of end trim and trim channels before installation.	\$28
<b>Utility Hook</b>					
1 <sup>1</sup> / <sub>2</sub> "	3 <sup>4</sup> / <sub>4</sub> "	1 <sup>1</sup> / <sub>2</sub> "	<b>99KUH</b>	Works with Cetra panels. Hook is secured in place by panel top cap.	\$25

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Box drawer dividers: black plastic
- Overhead/shelf divider, coat hook, CD holder, and utility hook: cinder

### How to Specify

#### Coat Hook

- ① Model
- ② Application:  
**C** = Cetra  
**X** = Xsite, Traxx, or Slat Tiles  
**I** = Interworks EQ


#### All Others

- ① Model

# Organizational Tools

Pricing

continued

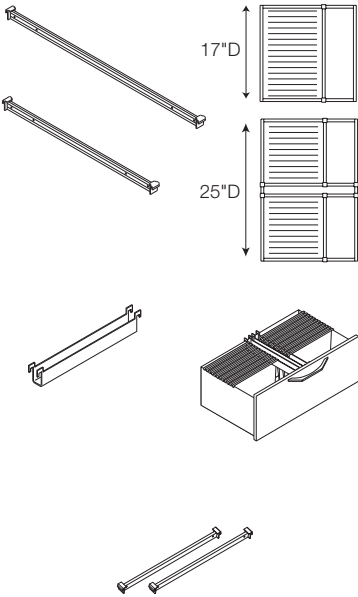

D	W	H	Model	Planning Factors	Price
<b>Front-to-Back File Bars</b>					
<i>For Use in 17"D Caseloads File Drawers</i>					
17 1/16"	13 1/16"		<b>99K17FBFB3</b>	Allows for front-to-back letter filing. Set of three. One file bar used per drawer.	\$60
<i>For Use in 25"D Caseloads File Drawers</i>					
25 1/8"	13 1/16"		<b>99K25FBFB6</b>	Allows for front-to-back letter filing. Set of six. Two file bars used per drawer.	\$89
<i>For Use in LF Series™, and Fundamental™, and Footprint® Flat Profile Undersurface Lateral File Drawers</i>					
15 3/4"	11 1/8"	1 3/4"	<b>99KFFB</b>	Allows for front-to-back letter filing. Set of two. One set of dividers required per drawer. Front-to-back file bars provide 2 rows of letter or 1 row of legal in 30"W file, 2 rows of letter or 2 rows of legal in 36"W file, 3 rows of letter or 2 rows of legal in 42"W file.	\$25
<b>Side-to-Side File Bars</b>					
<i>For Use in Footprint Flat Profile Metal Pedestals and File Centers, and Hum. Minds at Work.™ File Drawers</i>					
3/4"	11 15/16"	3/4"	<b>99KFB</b>	Set of two.	\$25

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

## Standard Includes

- File bars: black

## How to Specify

- 1 Model

## Organizational Tools

Pricing

continued

GSA SIN 711-8




D	W	H	Model	TFL (LL)	HPL (L)
<b>Laminate Side-to-Side Surface Dividers</b>					
24"	5 <sup>5</sup> / <sub>16</sub> "**	13 <sup>1</sup> / <sub>2</sub> "	<b>99K2414SSD</b>	\$271	\$353
30"	5 <sup>5</sup> / <sub>16</sub> "**	13 <sup>1</sup> / <sub>2</sub> "	<b>99K3014SSD</b>	294	381
24"	5 <sup>5</sup> / <sub>16</sub> "**	20 <sup>7</sup> / <sub>16</sub> "	<b>99K2421SSD</b>	295	401
30"	5 <sup>5</sup> / <sub>16</sub> "**	20 <sup>7</sup> / <sub>16</sub> "	<b>99K3021SSD</b>	322	435

<b>Upholstery Fabric Grade</b>										
D	W	H	Model	1 or COM	2	3	4	5	6	7
<b>Fabric Side-to-Side Surface Dividers in Seating Fabric</b>										
24"	5 <sup>5</sup> / <sub>16</sub> "**	13 <sup>1</sup> / <sub>2</sub> "	<b>99K2414SSDF</b>	\$587	\$613	\$629	\$646	\$670	\$695	\$721
30"	5 <sup>5</sup> / <sub>16</sub> "**	13 <sup>1</sup> / <sub>2</sub> "	<b>99K3014SSDF</b>	607	633	649	666	690	715	741
24"	5 <sup>5</sup> / <sub>16</sub> "**	20 <sup>7</sup> / <sub>16</sub> "	<b>99K2421SSDF</b>	641	667	683	700	724	749	775
30"	5 <sup>5</sup> / <sub>16</sub> "**	20 <sup>7</sup> / <sub>16</sub> "	<b>99K3021SSDF</b>	664	690	706	723	747	772	798

<b>Panel Fabric Grade</b>									
D	W	H	Model	A	B	C	D	E	
<b>Fabric Side-to-Side Surface Dividers in Panel Fabric</b>									
24"	5 <sup>5</sup> / <sub>16</sub> "**	13 <sup>1</sup> / <sub>2</sub> "	<b>99K2414SSDF</b>	\$587	\$609	\$622	\$645	\$677	
30"	5 <sup>5</sup> / <sub>16</sub> "**	13 <sup>1</sup> / <sub>2</sub> "	<b>99K3014SSDF</b>	607	629	642	665	697	
24"	5 <sup>5</sup> / <sub>16</sub> "**	20 <sup>7</sup> / <sub>16</sub> "	<b>99K2421SSDF</b>	641	663	676	699	731	
30"	5 <sup>5</sup> / <sub>16</sub> "**	20 <sup>7</sup> / <sub>16</sub> "	<b>99K3021SSDF</b>	664	686	699	722	754	

\* Bracket width; divider is 3/4" wide (thickness).

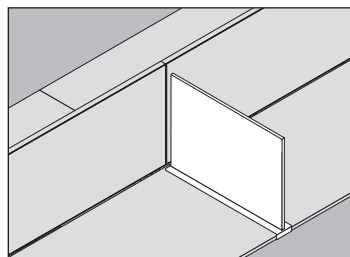

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Surface divider
- Attachment hardware

### How to Specify

#### Laminate Dividers

- Model
- Material  
LL = TFL  
L = HPL (markerboard)
- Laminate designator
- Frame paint group  
STD = Group 1  
STDM = Group M (+10%)  
STD21 = Group 21 (+10%)
- Frame paint designator

#### Fabric Dividers

- Model
- Fabric grade
- Fabric number
- Frame paint group  
STD = Group 1  
STDM = Group M (+10%)  
STD21 = Group 21 (+10%)
- Frame paint designator






## Collaboration Tools

### Tackboards & Markerboards

### Pricing

GSA SIN 711-8  
COM GSA Non-Contract

D	W	H	Model	Panel Fabric Price Grade				
				A or COM	B	C	D	E
Wall-Mount Tackboards								
7/8"	30"	20"	99K3020TBW	\$162	\$186	\$202	\$227	\$264
	36"		99K3620TBW	186	210	226	251	288
	42"		99K4220TBW	196	220	236	261	298
	48"		99K4820TBW	209	233	249	274	311
D	W	H	Model	Price				
Wall-Mount Markerboards								
3/4"	29 13/16"	30"	99K3030MBW					\$455
	35 13/16"		99K3630MBW					474
	41 13/16"		99K4230MBW					528
	47 13/16"		99K4830MBW					622
	59 13/16"	36"	99K6036MBW					772
Hanging Markerboard Tile								
2 3/4"	19"	14 3/4"	99K1915HMT					\$230
Name/Sign Holder								
3/8"	4 3/8"	4 3/8"	99K0404NH					\$140



Hanging markerboard tile may be used with:

- Xsite Traxx
- Metal slat tiles
- Lower mobile table screens.

Expo or Expo2 dry erase markers are recommended for use on marker boards. Low-odor dry erase markers are not recommended, as they may leave undesirable results when erased.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Wall-mount tackboards: fabric on one side
- Wall-mount markerboards: black tray and 409M Icey White marker-board
- Mounting hardware for wall-mount models
- Hanging markerboard tile: cinder frame with porcelain markerboard surface.
- Name/sign holder: double-faced tape and blinder for hard surface applications or appropriate mounting bracket for panels or slat tiles

### How to Specify

#### Tackboards

- 1 Model
- 2 Fabric grade
- 3 Fabric number

#### Markerboards and Markerboard Tiles

- 1 Model

#### Name/Sign Holder

- 1 Model
- 2 Application:
  - H** = Hard surfaces, including Hum central and return screens
  - C** = Cetra panels
  - X** = Xsite panels or slat tiles
  - I** = Interworks EQ panels
- 3 Finish:
  - B** = Black
  - P** = Platinum

## Collaboration Tools

### Mobile Screens

### Pricing

GSA SIN 711-8  
COM GSA Non-Contract

D	W	H	Model	Fabric Price Grade				
				A or COM	B	C	D	E
Fabric Starter Screen								
1¾"	23⅞"	67½"	99K2468MSSF	\$578	\$618	\$644	\$686	\$748
	29⅞"		99K3068MSSF	607	655	687	737	811
Fabric Add-On Screen								
1¾"	23⅞"	67½"	99K2468MSAF	\$578	\$618	\$644	\$686	\$748
	29⅞"		99K3068MSAF	607	655	687	737	811
D	W	H	Model	Price				
Translucent Starter Screen								
1¾"	23⅞"	67½"	99K2468MSST					\$698
	29⅞"		99K3068MSST					796
Translucent Add-On Screen								
1¾"	23⅞"	67½"	99K2468MSAT					\$695
	29⅞"		99K3068MSAT					791
Markerboard Starter Screen								
1¾"	23⅞"	67½"	99K2468MSSM					\$711
	29⅞"		99K3068MSSM					851
Markerboard Add-On Screen								
1¾"	23⅞"	67½"	99K2468MSAM					\$703
	29⅞"		99K3068MSAM					849

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Screen: fabric, translucent plastic, or 409M Icy White markerboard
- Two casters on starter screens; one caster on add-on models

### Planning Factors

A minimum of two screens are required for screens to stand. For safety and stability, the angle of screens must not exceed 115°.

Only one starter screen can be used for each grouping. Additional screens must be add-ons.

### How to Specify

#### Fabric

- ① Model
- ② Frame finish designator:  
462 = Cinder  
501 = Platinum metallic (+10%)
- ③ Fabric grade
- ④ Fabric number

#### Translucent and Markerboard

- ① Model
- ② Frame finish designator:  
462 = Cinder  
501 = Platinum metallic (+10%)



Expo or Expo2 dry erase markers are recommended for use on marker boards. Low-odor dry erase markers are not recommended, as they may leave undesirable results when erased.

## Collaboration Tools

Pricing

Visual Boards

GSA SIN 711-8



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Visual Board without Molding</b>				
41¼"	48"	48"	<b>AVB-4848W</b>	\$3078
<b>Visual Board with Molding</b>				
41¼"	48"	48"	<b>AVB-4848WM</b>	\$3114

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Two doors
- Metal frame: black
- White porcelain on steel writing surface
- Tackable fabric-covered panels on inside doors
- Fabric on tack panels is Guilford FR701-408 black
- Set of 4 dry erase markers and eraser
- Hardware
- Pegs on inside of doors for hanging flip charts
- Full length black door hinges

### How to Specify

- ① Model
- ② Finish price group:  
**STD** = Group 1  
**STD2** = Group 2 (+20%)
- ③ Finish designator

## Monitor Arms


Single and Dual

Pricing


GSA Non-Contract

D	W	H	Model	Price
<b>Single-Monitor Arms</b>				
<b>Slat Mount</b>				
20 <sup>5</sup> / <sub>16</sub> "	4 <sup>1</sup> / <sub>2</sub> "	14 <sup>1</sup> / <sub>16</sub> "	99KSMAM2SMS	\$440
<b>Clamp Mount*</b>				
20 <sup>3</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>2</sub> "	18 <sup>1</sup> / <sub>4</sub> "	99KSMAM2CMS	\$440
<b>Grommet/Bolt-Through Mount</b>				
20 <sup>3</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>2</sub> "	18 <sup>1</sup> / <sub>4</sub> "	99KSMAM2GMS	\$440
<b>Xsede Accessory-Rail Mount</b>				
20 <sup>3</sup> / <sub>4</sub> "	4 <sup>1</sup> / <sub>2</sub> "	18 <sup>1</sup> / <sub>4</sub> "	99KSMAM2ARMS	\$426
<b>Dual-Monitor Arms with Crossbar</b>				
<b>Clamp Mount*</b>				
21 <sup>1</sup> / <sub>2</sub> "	26 <sup>7</sup> / <sub>8</sub> "	20"	99KSMACBM8CMS	\$878
<b>Clamp Mount for Use with Xsede Wire Gap Worksurfaces</b>				
21 <sup>1</sup> / <sub>2</sub> "	26 <sup>7</sup> / <sub>8</sub> "	20"	99KSMACBM8LCMS	\$851
<b>Grommet/Bolt-Through Mount</b>				
21 <sup>1</sup> / <sub>2</sub> "	26 <sup>7</sup> / <sub>8</sub> "	20"	99KSMACBM8GMS	\$878
<b>M/Flex Dual-Monitor Arm</b>				
<b>Clamp Mount</b>				
21 <sup>1</sup> / <sub>2</sub> "	26 <sup>7</sup> / <sub>8</sub> "	20"	99KMF2DACM12S	\$697


### Single



Slat



Clamp  
for Xsede




Grommet/  
Bolt-Thru




Accessory  
Rail


### Dual with Crossbar



Clamp




Clamp  
for Xsede






Grommet/  
Bolt-Thru

### M/Flex Dual



Clamp



Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Monitor arm: silver finish with gray trim
- 100mm x 100mm VESA plate
- Slat, clamp, or grommet mounting bracket

### How to Specify




- 1 Model

\*Not compatible with Xsede.


## Keyboard Supports

Pricing

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



Note: Mounting slide is not shown on the illustrations above.



D	W	H	Model	Tray Tilt Adjustment	Vertical Adjustment*		Rotation	Price
					Above Surface	Below Surface		
Adjustable Keyboard Kits								
Manual Adjustment								
17"	28½"	6"	99K1706KK2	-15° to +15°	11¾"	6⅞"	360°	\$547
22"	28½"	8"	99K2208KK2	-15° to +15°	15¼"	7⅜"	360°	602
Intuitive Adjustment								
17"	28½"	6"	99K1706KK1	-15° to +10°	17/16"	615/16"	360°	\$636
22"	28½"	8"	99K2208KK1	-15° to +10°	211/16"	8"	360°	699
Sit-to-Stand Adjustable Keyboard Kit								
Intuitive Adjustment								
23"	28½"	10¾"	99K2319KKS1	-10° to +15°	8"	69/16"	360°	\$737
Keyboard Adjusters								
For Use on 42"W Straight Adjustable Split Corner Worksurface (13/16"); set of 2 (one required per worksurface)								
13"	8"	3"	99K42KA	-12° to +18°	1" (Lockable)	3"	—	\$664
For Use on 48"W Straight Adjustable Split Corner Worksurface (13/16")								
25"	30¾"	61/8"	99K48KA	-15° to +9°	1" (Lockable)	5"	—	\$866

\*Vertical adjustment dimensions are based on 1⅜"-thick worksurface; they can also be used on 1⅞"-thick worksurfaces.

### Planning Factors

17"D adjustable keyboard kits are recommended for bridge applications; 22" and 23"D adjustable keyboard kits can be used in corner-mount applications.

Width of keyboard kits includes mouse tray. Keyboard tray is 20⅞"W; mouse tray is 9" in diameter and is non-handed for mounting on the left or right.

Manual and intuitive adjustable keyboard kits slide in and out under the surface.

Keyboard kits will not be flush with the worksurface edge (in the stored, recessed position) when mounted in accordance with the manufacturer's directions.

Keyboard kits can be used with Xsede when undersurface support rails are not used.

➤ See page 4.13 for a cross reference chart by furniture series of keyboard kits that comply to ANSI/HFES Method 2.

### Standard Includes

#### Adjustable Keyboard Kit

- Keyboard arm: black
- Foam gel wrist rest: black
- High-density polyethylene tray and ABS mouse tray: black



### How to Specify

- 1 Model

## Keyboard Supports

Pricing

continued



D	W	H	Model	Planning Factors	Price
<b>Wood Keyboard Drawer</b>					
17 <sup>1</sup> / <sub>4</sub> "	25 <sup>5</sup> / <sub>8</sub> "	4 <sup>1</sup> / <sub>8</sub> "	<b>99K1826KDW</b>	For use under 29"H worksurface; 18" front-to-back and 27" side-to-side clearance required under worksurface. Locks into position when in use.	\$409
<b>Keyboard Tray</b>					
14"	23 <sup>1</sup> / <sub>2</sub> "	3"	<b>99K1424KT</b>	For use under 29"H worksurface; 15" front-to-back and 25 <sup>1</sup> / <sub>2</sub> " side-to-side clearance required. Locks into position when in use.	\$135
<b>Keyboard Tray with Sliding Mouse Pad</b>					
19"	24"	2 <sup>3</sup> / <sub>8</sub> "	<b>99K1924KTM</b>	Features adjustable palm rest and sliding mouse pad. Height can range from 2 <sup>11</sup> / <sub>32</sub> " to 3 <sup>11</sup> / <sub>16</sub> " in 7/ <sub>32</sub> " increments. 20" front-to-back and 26" side-to-side clearance required under the worksurface.	\$405
<b>Corner Sleeve</b>					
<i>For Use with 1<sup>3</sup>/<sub>16</sub>" Worksurfaces</i>					
11 <sup>9</sup> / <sub>16</sub> "	22"	1 <sup>3</sup> / <sub>8</sub> "	<b>99K1222SL2</b>	For use at corner junction of two perpendicular worksurfaces; creates 45°-angle instant corner surface. Removable.	\$127
<i>For Use with 1<sup>9</sup>/<sub>16</sub>" Worksurfaces</i>					
11 <sup>3</sup> / <sub>4</sub> "	22"	1 <sup>3</sup> / <sub>4</sub> "	<b>99K1222SL</b>	For use at corner junction of two perpendicular worksurfaces; creates 45°-angle instant corner surface. Removable.	\$127

Keyboard drawers and trays are not for use with Priority Progressive work-surfaces, as they will conflict with the undersurface support rails.

*Exceptions: Due to the extra clearance afforded by the shape of corner worksurfaces, keyboard tray model 99K1424KT can be used on Priority Progressive 90° corner surfaces; all keyboard drawer and tray models on this page can be used on Priority Progressive 120° corner surfaces.*

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Keyboard Tray

- Metal tray: Matte black
- Sliding mouse pad and adjustable palm rest on applicable model

#### Corner Sleeve

- Metal sleeve: Black textured finish

### How to Specify

#### Wood Keyboard Drawer

- ① Model
- ② Finish price group:  
**STD** = Group 1
- ③ Finish designator

#### All Others

- ① Model

## CPU Supports

### Pricing

GSA SIN 711-8  
† GSA Non-Contract

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Planning Factors</i>	<i>Price</i>
----------	----------	----------	--------------	-------------------------	--------------

### Hanging CPU Holder




9 <sup>5</sup> / <sub>8</sub> "	6 <sup>9</sup> / <sub>16</sub> "	18 <sup>1</sup> / <sub>2</sub> "	<b>99KCPUH</b>	7 <sup>1</sup> / <sub>2</sub> " depth adjustment, 5 <sup>3</sup> / <sub>4</sub> " width adjustment, and 9" height adjustment. Black. Attaches to underside of worksurface. Swivels 360°. Hanging CPU holder is not for use with Priority Progressive undersurface support rails.	\$250
---------------------------------	----------------------------------	----------------------------------	----------------	--	-------

### Mobile CPU Cart †

15"	8 <sup>1</sup> / <sub>2</sub> "	8 <sup>5</sup> / <sub>16</sub> "	<b>99KCPUMCB</b>	Black. Adjusts to support CPUs up to 9"W and 40 lbs. Adds 3 <sup>3</sup> / <sub>4</sub> " to height of installed CPU.	\$157
-----	---------------------------------	----------------------------------	------------------	---	-------

### Laptop/Equipment Lock System †

39"			<b>99KLTLC</b>	39" long x 1/4" diameter nylon-jacketed stainless steel cable. Includes two Kimball lock cores (one on each end; keyed randomly between 001–005), one key, and one anchor. Locks into laptop, printer, CPU tower, or other portable electronic equipment, as well as specifically designed slots in Hum, Scenario, and Perks power/data drawers. Anchor can be field installed into any wood-based panel or worksurface.	\$73
-----	--	--	----------------	--	------



### How to Specify

- 1 Model

## Cable Management

Pricing

### Grommets

GSA SIN 711-8



D	W	H	Model	Finish/Material	For Use With	Price
<b>Round Metal G7 Grommets</b>						
2 1/2" dia.	1 1/8"		<b>99KG7MB</b>	Matte Black metal	Definition®, Innsbruck™, Transcend®	\$41
2 1/2" dia.	1 1/8"		<b>99KG7PL</b>	Platinum Metallic metal	Definition	41
2 1/2" dia.	1 1/8"		<b>99KG7SN</b>	Satin Nickel metal	Transcend	41
2 1/2" dia.	1 1/8"		<b>99KG7AB</b>	Antique Brass metal	President™, Senator®	41
<b>Round Metal G19 (G12) Grommets with Locking Cap and Brush Access</b>						
2 5/8" dia.	3/4"		<b>99KG19PL</b>	Platinum Metallic metal	Definition, Dock, Priority™, Scenario® 1 3/16", Xsede™	\$51
2 5/8" dia.	3/4"		<b>99KG19DW</b>	Designer White metal	Definition, Dock, Priority, Scenario 1 3/16", Xsede	51
2 5/8" dia.	3/4"		<b>99KG19CM</b>	Carbon Metallic metal	Definition, Dock, Priority, Scenario 1 3/16", Xsede	51
2 5/8" dia.	3/4"		<b>99KG19490</b>	Polished Chrome metal	Definition, Xsede, Priority	51
2 5/8" dia.	3/4"		<b>99KG19487</b>	Brushed Nickel metal	Definition, Xsede, Priority	51
2 5/8" dia.	3/4"		<b>99KG19544</b>	Silver Pearl metal	Definition, Dock, Priority, Scenario 1 3/16", Xsede	51
2 5/8" dia.	3/4"		<b>99KG12MN</b>	Matte Nickel metal	Hum. Minds at Work.®	51
<b>Round Plastic G50, G60, G65, and G80 Grommets</b>						
2 5/16"	3/4"		<b>99KG50</b>	Matte Black plastic	Footprint®	\$25
2 3/4"	3/4"		<b>99KG60</b>	Matte Black plastic	Dock, Footprint, Priority, Scenario 1 3/16"	25
2 3/4"	3/4"		<b>99KG65</b>	Silver plastic	Dock, Footprint, Priority, Scenario 1 3/16"	25
3 1/2"	1"		<b>99KG80</b>	Matte Black plastic	Footprint	27

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### How to Specify

#### 1 Model

Note: Grommets maybe used in any worksurface, except Scenario 1/2"-thick tops.



## Cable Management

Pricing

Grommets, continued

GSA SIN 711-8

D	W	H	Model	Finish/Material	For Use With	Price
---	---	---	-------	-----------------	--------------	-------

### Rectangular Plastic G90 Grommets

4 <sup>1</sup> / <sub>8</sub> "	2 <sup>5</sup> / <sub>8</sub> "	1 <sup>1</sup> / <sub>8</sub> "	<b>99KG90</b>	Matte Black plastic	Also compatible with power/data center model 99K0208ELPDC when a sleeve insert is desired.	\$26
---------------------------------	---------------------------------	---------------------------------	---------------	---------------------	--	------

### Rectangular Metal G18 Grommets

2 <sup>3</sup> / <sub>4</sub> "	7 <sup>1</sup> / <sub>4</sub> "	1 <sup>3</sup> / <sub>16</sub> "	<b>99KG18SS</b>	Silver Satin Aluminum	Fluent®	\$77
---------------------------------	---------------------------------	----------------------------------	-----------------	-----------------------	---------	------

### Square Metal G17 Grommets

2 <sup>3</sup> / <sub>4</sub> "	2 <sup>3</sup> / <sub>4</sub> "	1 <sup>3</sup> / <sub>16</sub> "	<b>99KG17SS</b>	Silver Satin Aluminum	Fluent	\$41
---------------------------------	---------------------------------	----------------------------------	-----------------	-----------------------	--------	------

### Rectangular Metal C31 Single-Sided Access Grommet

3 <sup>15</sup> / <sub>16</sub> "	9 <sup>5</sup> / <sub>16</sub> "	9 <sup>1</sup> / <sub>16</sub> "	<b>KCEK31SAA</b>	Anodized aluminum; fits 3 <sup>21</sup> / <sub>32</sub> " x 9 <sup>3</sup> / <sub>16</sub> " cut-out.		\$137
-----------------------------------	----------------------------------	----------------------------------	------------------	---	--	-------

### Rectangular Metal C30 Dual-Sided Access Grommet




4 <sup>11</sup> / <sub>32</sub> "	12 <sup>19</sup> / <sub>32</sub> "	1 <sup>5</sup> / <sub>16</sub> "	<b>KCEK30DAA</b>	Anodized aluminum; fits 4 <sup>1</sup> / <sub>32</sub> " x 12 <sup>9</sup> / <sub>32</sub> " cut-out.		\$248
-----------------------------------	------------------------------------	----------------------------------	------------------	---	--	-------

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### How to Specify

① Model

*Note: Grommets maybe used in any worksurface, except Scenario 1/2"-thick tops.*




## Cable Management

### Vertical Cable Managers

### Pricing

GSA SIN 711-8

D	W	H	Model	Planning Factors	Price
<b>Flexchain Cable Manager</b>					
2 1/8"	3 7/8"	36 3/8"	<b>99K36CMFC</b>	Connects to the underside of worksurface to route cables and power-infeeds to the floor	\$169
<b>Flexchain U-Bracket</b>					
			<b>99KFCB</b>	Connects a flexchain to wall outlet.	\$22
<b>Expandable Cable Manager</b>					
6"	3 3/4"	7-48"	<b>99KECMB</b>	Weighted base; ideal for height-adjustable tables.	\$162
4 3/4"		7-43 5/16"	<b>KCUCMHW</b>	White base with neutral brushes	206
4 3/4"		7-43 5/16"	<b>KCUCMHC</b>	Chrome base with black brushes	206
<b>Vertical Cable Managers for Caseloads</b>					
<b>Black</b>					
	17 3/4"		<b>99K18WMV</b>	For use with caseload products to manage cords on a vertical surface; attaches to surface with double-sided adhesive.	\$56
<b>Semi-Translucent (set of 4)</b>					
15 1/16"	9 1/16"	19 3/16"	<b>99K19WMV</b>	For use with Fluent highback support assembly leg to manage cords. Can be cut in the field to size for other applications. Adheres to metal, paint, or veneer; peel film and press in place.	\$38
15 1/16"	9 1/16"	26 5/8"	<b>99K27WMV</b>	For use with Fluent leg assembly, Priority U-legs and open-frame legs to manage cords. Can be cut in the field to size for other applications. Adheres to metal, paint, or veneer; peel film and press in place.	53

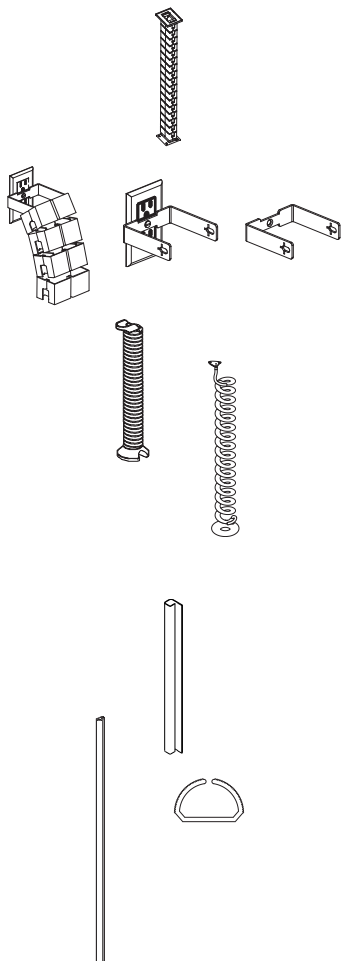

Systems-Specific Vertical Cable Managers  
➤ See the *Kimball Panel Systems Price List*.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

- Flexchain cable manager: clear
- Flexchain U-bracket: black
- Expandable cable manager: ABS black plastic; attachment hardware included
- Vertical cable managers: black or semi-translucent white polypropylene

### How to Specify

- 1 Model





Cable Management

Pricing

Horizontal Cable Managers

GSA SIN 711-8

D	W	H	Model	Planning Factors	Price
<b>U-Shaped Cable Manager</b> (set of 6)					
2"	40"	2"	99K40WMHU	For use under a worksurface. Each section of 40" in length; cut to size.	\$70
<b>W-Shaped Cable Manager</b> (set of 6)					
3"	29½"	1½"	99K30WMHW	For use under a worksurface. Each section is 29½" in length; cut to size.	\$91
<b>Loop-Style Cable Manager</b> (set of 6)					
29¼"	3⅝"	19⁄16"	99KCMU	Individual loops. Openings are 1"D x ⅝"W x 1"H and can be removed to expand individual capacity.	\$54
<b>P-Shaped Cable Managers</b>					
2⅜"	24"	1⅝"	KCE24LJWM		\$43
2⅜"	30"	1⅝"	KCE30LJWM		49
2⅜"	36"	1⅝"	KCE36LJWM		56
2⅜"	48"	1⅝"	KCE48LJWM		60



Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

Standard Includes

- Cable manager(s); black plastic
- Dual-stick tape with P-shaped models


How to Specify

- ① Model

Cable Management

Pricing

Wire Manager Fillers

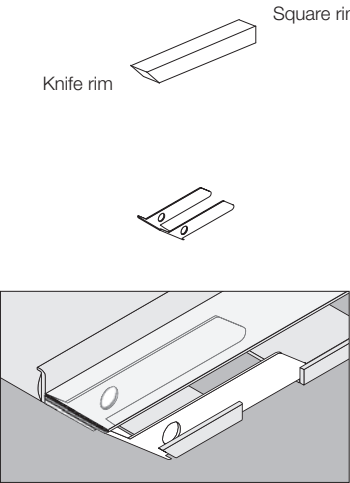

D	W	H	Model	Description	Price
<b>Foam Wire Manager Fillers</b>					
6"	7/8"	11/16"	99KWMF	Set of 6. For use on surfaces with square or knife rim profile.	\$40
<b>Metal Wire Manager Filler</b>					
3"	15/16"	11/16"	99KWMF2	For use on surfaces with knife rim profile on the side edge.	\$24

Footprint Wire Manager Filler Cap  
➤ See the Worksurfaces and Support chapter in the *Kimball Surfaces & Storage Price List*.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

Standard Includes

- Wire manager filler

How to Specify

Foam Wire Manager Filler

- ① Model

Metal Wire Manager Filler

- ① Model
- ② Finish designator:
  - 480 = Antique White
  - 403 = Chamois
  - 462 = Cinder
  - 440 = Cloud
  - 485 = Dark Chocolate
  - 405 = Designer White
  - 450 = Fog
  - 488 = Frosty White
  - 461 = Graphite
  - 420 = Sandstone
  - 425 = Shadow
  - 460 = Storm


## Power/Data/Voice Accessories

Pricing

Clamp Mount

GSA SIN 711-8

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Planning Factors</i>	<i>Price</i>
<b>Ashley Duo™ Clamp-Mount Power/USB Center</b>					
5½"	7½"		<b>KCE0306ADCM</b>	Clamp mount adjusts to accommodate ½" - to 1½"-thick surfaces. When installed, unit height is 3" above the surface. For use with P, J, or F rim profiles. Not for use with knife rim, reverse knife rim, sloped edge, or wire manager surfaces.	\$316
<b>Clamp-on Power Module</b>					
2⅝"	3⅝"	2"	<b>99KELPM2</b>	Clamp hand tightens and can be removed. Can be secured to worksurfaces up to 1⁄16" thick.	\$168
<b>Clamp-on Voice/Data Module</b>					
2⅝"	3⅝"	2"	<b>99KELDM2</b>	Two openings. Does not include jacks; end user supplies jacks, cabling, and voice/data connection to work with standard, keystone-style CAT3, CAT5, CAT5e, and CAT6 jacks or couplers, Avaya (Lucent) proprietary jacks, Orthonics CAT5, CAT5e, and CAT6, or blanks for no opening. Clamp hand tightens and can be removed.	\$145



All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Ashley Duo

- Two 15-amp receptacles
- Two 2.1 amp USB ports
- White housing with silver bezel or black housing with black bezel
- 6'L cord in matching color

#### Clamp-On Power Module

- Two 15-amp NEMA-rated receptacles
- 9'L grounded cord with 15-amp plug: black
- Black housing

#### Clamp-on Voice/Data Module

- Data jack adapter bezel tree
- Black housing

### How to Specify

#### Ashley Duo

- 1 Model
- 2 Housing color:  
**WW** = White  
**BB** = Black


#### Clamp-On Power Module or Voice/Data Module

- 1 Model

## Power/Data/Voice Accessories

Pricing

### Above-Surface Mount



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Planning Factors</i>	<i>Price</i>
<b>Surface-Mount Power/USB Center</b>					
2¾"	7⅝"	2⅛"	<b>99K0207PDB</b>	Mounts on top of surface with non-skid bottom; no field scribing required.	\$604
<b>Power Module</b>					
2⅛"	3"	3¾" (cover open) 2" (cover closed)	<b>99KELPM</b>	Fits into worksurface wire manager. Not for use on Hum. Minds at Work.® or Scenario® ½" surfaces.	\$155
<b>Voice/Data Module</b>					
2⅛"	3"	3¾" (cover open) 2" (cover closed)	<b>99KELDM</b>	Two 1½"D x 1⅓"W x 2¾"H openings. Can replace fittings and cables with CAT5 or CAT6 fittings and cables; not provided. Fits into worksurface wire manager. Not for use on Hum or Scenario ½" surfaces.	\$175

Data modules accept CAT5 and CAT6 cabling. Siemens CAT6 jacks are recommended.

Data ports accept Amp Flex-Mode and Panduit Mod-Corn connector modules. Contact your local data communications supplier for the appropriate connector modules.

All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Surface-Mount Power/USB Center

- One 2-amp USB duplex for charging electronics
- Three power outlets
- 10' 15-amp power cord
- Housing: black or white high-gloss plastic

#### Power Module

- Two 15-amp NEMA-rated receptacles
- 6'L grounded cord with 15-amp plug; black
- Black housing with frost cover

#### Voice/Data Module

- Two CAT5e-certified RJ45 fittings (ports)
- Two 6'L CAT5e cables with jacks on either end
- Black housing with frost cover

### How to Specify

#### Surface-Mount Power/USB Center

- 1 Model
- 2 Housing color:  
W = White  
B = Black

#### Power Module or Voice/Data Module




- 1 Model

## Power/Data/Voice Accessories

Pricing

### Surface Mount

Diameter	H	Model	Planning Factors	Price
<b>Salt USB Unit</b>				
2"	2 1/8"	<b>KCE02SUSM</b>	1 3/4"-diameter surface cut-out required. Unit extends 1/8" above the surface when installed.	\$200
<b>Pepper Power Center</b>				
2"	2 1/8"	<b>KCE02PPSM</b>	1 3/4"-diameter surface cut-out required. Unit extends 1/8" above the surface when installed.	\$71
<b>Node® Power Center</b>				
3 3/8"		<b>KCEBN20PP</b>		\$188
<b>Node® Power/USB Center</b>				
3 3/8"		<b>KCEBN11PU</b>		\$290



All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Salt USB Unit

- 2 two-amp USB ports
- Housing: white or black
- 6' cord in matching color

#### Pepper Power Unit

- 1 receptacle
- Housing: white or black
- 6' cord in matching color

#### Node Power Center

- 10' cord with three-prong plug
- Two power receptacles
- Metallic silver powdercoat finish
- Fits C6 cut-out

#### Node Power/USB Center

- 10' cord with three-prong plug
- One power receptacle
- One duplex USB
- Metallic silver powdercoat finish
- Fits C6 cut-out

### How to Specify

#### Salt USB Unit or Pepper Power Unit

- 1 Model
- 2 Housing color:  
W = White  
B = Black

#### Node Power or Power/USB Center

- 1 Model



## Power/Data/Voice Accessories

Pricing

Surface Mount, continued

GSA SIN 711-8  
† GSA Non-Contract

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Planning Factors</i>	<i>Price</i>
<b>Pull-Up Power/USB Grommet</b>					
2 <sup>3</sup> / <sub>8</sub> "	1 1 <sup>1</sup> / <sub>4</sub> "		<b>KCE0211PUPUGMB</b> †	2 <sup>3</sup> / <sub>8</sub> "-diameter surface cut-out required. In stored position, unit extends 11 <sup>5</sup> / <sub>8</sub> " below the surface. Unit sits flush on surface when in use.	\$251
<b>Retractable Power/Communication Center</b>					
4 <sup>1</sup> / <sub>8</sub> "	2 <sup>5</sup> / <sub>8</sub> "	10 <sup>1</sup> / <sub>4</sub> "	<b>99KELPDCR</b>	Includes one 1 <sup>1</sup> / <sub>2</sub> "D x 1 <sup>3</sup> / <sub>8</sub> "W x 2 <sup>3</sup> / <sub>4</sub> "H opening. Extends 7" above surface; for use in open kneespace only. Interior septum provides complete separation of power and communication utilities. Accepts Tyco (Amp) Flex-Mode and Panduit Mod-Com connector modules.	\$216
<b>Power/Communication Grommet</b>					
4 <sup>1</sup> / <sub>4</sub> " dia.	5 <sup>1</sup> / <sub>4</sub> "		<b>99K0405ELPDG</b>	3 <sup>1</sup> / <sub>2</sub> "-diameter surface cut-out required.	\$574



All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Pull-Up Power/USB Grommet

- Four receptacles
- Two USB ports
- Overcurrent and voltage protection
- 10' black cord
- Finger-pull access
- Black housing

#### Retractable Power/Communication Center

- Two 15-amp NEMA-rated simplex receptacles (all flush)
- 6'L grounded cord with 15-amp plug: black
- Black housing with frost cover

#### Power/Communication Grommet

- Two power outlets
- One data port (RJ45)
- One voice port (RJ11)
- 6' grounded cord with 15-amp plug: black
- Plastic housing: black

### How to Specify

- 1 Model






## Power/Data/Voice Accessories

Pricing

Surface Mount, continued

GSA SIN 711-8



All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

D	W	H	Model	Planning Factors	Price
<b>Single-Sided Pneumatic Pop-Up Power/Data Centers</b>					
<b>Power/Power</b>					
47/16"	55/16"	39/16"	<b>99KG21</b>	Silver finish. Requires a 4" x 5" cut-out.	\$484
<b>Power/Data</b>					
47/16"	55/16"	39/16"	<b>99KG22</b>	Silver finish. Requires a 4" x 5" cut-out.	\$484
<b>Power/USB</b>					
47/16"	55/16"	39/16"	<b>99KG26</b>	Silver finish. Requires a 4" x 5" cut-out.	\$370
<b>Ellora® Power/Data Center</b>					
55/16"	85/16"	35/8"	<b>99KPDCAM</b>	AV adapter kits and voice/data jacks must be provided by the customer. Extends 25/16" below the worksurface. Cannot be used in conjunction with a power/data drawer on 24" or 30"D worksurfaces. Specify a G20 cut-out on Definition®, Priority™, or Scenario® 13/16" surfaces for factory cut-out.	\$479
<b>Hardwire</b>					
55/16"	85/16"	35/8"	<b>99KPDCAMH</b>	For areas where local codes do not accept modular electrical plug-in components.	\$531
<b>Power/Data Center</b>					
21/4"	75/8"	23/4"	<b>99K0208ELPDC</b>	Mounts on top of surface; field scribing required. Extends 23/4" above surface. Compatible with rectangular plastic G90 grommet (model 99KG90) when a sleeve insert is desired.	\$273

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Single-Sided Pneumatic Pop-Up Power/Data Center

- Two power outlets on power/power model
- One power outlet and one data port on power/data model
- One power outlet and two USB ports on power/USB model
- 6' cord

#### Ellora Power/Data Center

- Three 15-amp, 110-volt electrical outlets
- One data port
- 10' power cord
- Housing: silver anodized aluminum

#### Above-Mount Power/Data Center

- Two simplex receptacles
- Two data port openings
- 6'L grounded cord with 15-amp plug: black
- Housing: black

### How to Specify

- 1 Model


## Power/Data/Voice Accessories

Pricing

Surface Mount, continued

GSA SIN 711-8  
† GSA Contract Pending

D	W	H	Model	Planning Factors	Price
<b>Ashley Duo™ Power/USB Center</b>					
4"	6½"	2⅞"	KCE0307ADBSMWW	2⅜" x 6" surface cut-out required. Can mount horizontally or vertically.	\$297
<b>Ashley Trio™ Power/Data/USB Center</b>					
4"	9"	2⅞"	KCE0409ATSMWW	2⅜" x 8½" surface cut-out required. Can mount horizontally or vertically.	\$341
<b>Axil Z Power/USB/Bluetooth Center</b>					
<i>Silver Faceplate with Black Trim</i>					
3"	11"	2½"	KCE311AXZPDUS †	Fits G27 cut-out	\$775
<i>Flat Black Faceplate and Trim</i>					
3"	11"	2½"	KCE311AXZPDUB †	Fits G27 cut-out	\$775

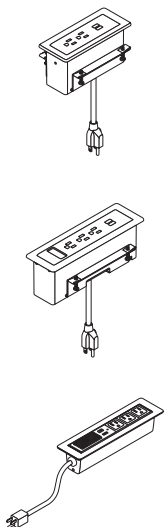

All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Ashley Duo

- Two receptacles
- Two USB ports
- Housing: white
- Bezel: white
- 6'L white cord

#### Ashley Trio

- Three receptacles
- Two USB ports
- One open port for HDMI, RJ45, or VGA
- Data plate adapter kit
- Housing: white
- Bezel: white
- 6'L white cord

#### Axil Z

- One bluetooth speaker
- One USB charging port: stainless steel
- Three receptacles
- 120"L cord

### How to Specify

- ① Model




## Power/Data/Voice Accessories

Pricing

Surface Mount, continued

GSA SIN 711-8

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Planning Factors</i>	<i>Price</i>
<b>Mho® Retractable Power/Data Center with Three-Prong Plug</b>					
4 $\frac{3}{8}$ "	8 $\frac{3}{8}$ "		<b>KCEB2PDPS</b>	Fits C4 cut-out.	\$370
<b>Mho® Retractable Power/Data/USB with Three-Prong Plug</b>					
4 $\frac{3}{8}$ "	8 $\frac{3}{8}$ "		<b>KCEB2PDUPS</b>	Fits C4 cut-out.	\$477
<b>Mho® Pop-Up Power/Data Center</b>					
4 $\frac{3}{8}$ "	8 $\frac{3}{8}$ "		<b>99KPC2MB</b>	Fits C4 cut-out.	\$370



All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Mho Power/Data Center

- Silver anodized aluminum body
- 10' cord with 15-amp straight, three-prong plug
- Two 15-amp receptacles
- Two blank data ports that can accommodate one of eight provided adapter plates
- Pop-up lid that sits flush with surface when closed

#### Mho Power/Data/USB Center

- Silver anodized aluminum body
- 10' cord with 15-amp straight, three-prong plug
- Two 15-amp receptacles
- One blank data port that can accommodate one of eight provided adapter plates
- One port with two USB charging outlets
- Pop-up lid that sits flush with surface when closed

#### Mho Pop-Up Power/Data Center

- Housing: matte black anodized aluminum
- Two simplex power outlets
- Two black voice/data ports
- Adapter kit for couplers and jacks
- 6' 15-amp power cord

### How to Specify

- ① Model

## Power/Data/Voice Accessories

Pricing

Surface Mount, continued

GSA SIN 711-8

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Power/USB Center

- 12' cord with 15-amp, three-prong plug
- Two 15-amp receptacles
- Two USB ports
- One touch open and close mechanism
- Safety photo-electronic eye prevents rotation when unit is in use
- Housing: anodized aluminum finish
- Fits C8 cut-out



#### Power/Data/USB Center

- 12' cord with 15-amp, three-prong plug
- Three 15-amp receptacles
- One RJ45 CAT5e data port
- One USB port
- One HDMI port
- One VGA port
- Two 3.5mm audio ports
- One touch open and close mechanism
- Safety photo-electronic eye prevents rotation when unit is in use
- Housing: anodized aluminum finish
- Fits C9 cut-out

### How to Specify

- 1 Model

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Planning Factors</i>	<i>Price</i>
<b>Vault Turnbox Power/USB Center</b>					
11 <sup>3</sup> / <sub>4</sub> "	4 <sup>3</sup> / <sub>8</sub> "	4 <sup>3</sup> / <sub>8</sub> "	<b>KCE4124PD</b>	Fits C8 cut-out.	\$1225
<b>Vault Turnbox Power/Data/USB Center</b>					
15 <sup>7</sup> / <sub>8</sub> "	4 <sup>3</sup> / <sub>8</sub> "	4 <sup>3</sup> / <sub>8</sub> "	<b>KCE4164PD</b>	Fits C9 cut-out.	\$1361



All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.




## Power/Data/Voice Accessories

Surface Mount, continued

Pricing

GSA SIN 711-8  
† GSA Contract Pending

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Planning Factors</i>	<i>Price</i>
<b>M2X Double-Sided Pneumatic Pop-Up Power/Data Centers</b>					
<b>Power/Power</b>					
8 <sup>1</sup> / <sub>16</sub> "	6 <sup>13</sup> / <sub>16</sub> "	3 <sup>9</sup> / <sub>16</sub> "	<b>99KG23</b>		\$968
<b>Power/Data</b>					
8 <sup>1</sup> / <sub>16</sub> "	6 <sup>13</sup> / <sub>16</sub> "	3 <sup>9</sup> / <sub>16</sub> "	<b>99KG24</b>		\$968
<b>Power/USB</b>					
8 <sup>1</sup> / <sub>16</sub> "	6 <sup>13</sup> / <sub>16</sub> "	3 <sup>9</sup> / <sub>16</sub> "	<b>99KG25</b>		\$1149
<b>M2X Retractable Power/Data Center</b>					
8"	10"	2 <sup>1</sup> / <sub>2</sub> "	<b>KCU0810ELPDC</b>	Fits C2 cut-out.	\$986
<b>For Hardwire Application</b>					
8"	10"	2 <sup>1</sup> / <sub>2</sub> "	<b>KCU0810ELPDCH</b>	Fits C2 cut-out.	\$1036
<b>M2X Retractable Power/Data/USB/HDMI/VGA Center</b>					
8"	10"	2 <sup>1</sup> / <sub>2</sub> "	<b>KCE820ELPDC</b>	Fits C2 cut-out.	\$1223
<b>For Hardwire Application</b>					
8"	10"	2 <sup>1</sup> / <sub>2</sub> "	<b>KCE820ELPDCH</b>	Fits C2 cut-out.	\$1223
<b>Mho® 2X Power/Data/USB</b>					
<b>Silver</b>					
8"	10"	2 <sup>1</sup> / <sub>2</sub> "	<b>KCE810M2XPDUAA</b> †	Fits C2 cut-out.	\$1162
<b>Black</b>					
8"	10"	2 <sup>1</sup> / <sub>2</sub> "	<b>KCE810M2XPDUAB</b> †	Fits C2 cut-out.	\$1162



All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

### Standard Includes

#### M2X Double-Sided Pneumatic Pop-Up Power/Data Center

- Three power outlets on each side (six total) on power/power model
- Two power outlets (four total) and one data port on each side (two total) on power/data model
- Side 1 two power outlets and one open data port; side 2 one power outlet and two USB
- 6' cord
- Housing: silver anodized aluminum

#### M2X Power/Data Center

- Four power outlets (2 per side)
- Six blank data ports (3 per side)
- Voice/adaptor kit to accept couplers and jacks
- One touch pivot open/close
- Two 10' power cords
- Housing: silver anodized aluminum

#### M2X Power/Data/USB/HDMI/VGA Center

- Four power outlets (2 per side)
- Two duplex USB charging ports (1 duplex per side)
- One HDMI port
- One VGA port
- Two blank data ports (1 per side)
- Voice/adaptor kit to accept couplers and jacks
- Two touch pivot open/close
- Two 6' power cords, rated at 15 amps 120 volts (1 per side)
- Housing: silver anodized aluminum

#### Mho 2X Power/Data/USB Center

- One 2-port USB charger
- One open data port
- Three power outlets
- 120"L power cord

### How to Specify

- 1 Model



## Power/Data/Voice Accessories

Pricing

Surface Mount, continued

GSA SIN 711-8

D	W	H	Model	Planning Factors	Price
<b>E2X Power/Data Center</b>					
11 <sup>3</sup> / <sub>8</sub> "	10 <sup>1</sup> / <sub>8</sub> "	3 <sup>1</sup> / <sub>2</sub> "	<b>KCE1110PDESMAA</b>	Fits C7 cut-out (11" x 9 <sup>1</sup> / <sub>16</sub> "). When installed, 2 <sup>3</sup> / <sub>8</sub> " of the unit is below the surface.	\$1244
<i>For Hardwire Application</i>					
11 <sup>3</sup> / <sub>8</sub> "	10 <sup>1</sup> / <sub>8</sub> "	3 <sup>1</sup> / <sub>2</sub> "	<b>KCE1110PDEHWSMAA</b>	Fits C7 cut-out (11" x 9 <sup>1</sup> / <sub>16</sub> "). When installed, 2 <sup>3</sup> / <sub>8</sub> " of the unit is below the surface.	\$1244
<b>40" Rectangular Power/Data Center</b>					
8"	40"	2 <sup>1</sup> / <sub>2</sub> "	<b>KCU0840ELPDC</b>	Fits C3 cut-out.	\$2535



All electrical accessories are available for field installation only.

U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### E2X Power/Data Center

Side 1:

- Three power outlets with 72" power cord
- One VGA DB15HD female with 120" cable
- One USB 2-port simplex charger
- One 3.5mm stereo jack

Side 2:

- Three power outlets with 72" power cord
- One USB 2-port simplex charger
- One HDMI coupler
- One open port
- Housing: silver anodized aluminum

#### 40" Rectangular Power/Data Center

- Eight power receptacles (4 per side [2 left and 2 right])
- Eight blank data ports; 4 left and 4 right (2 on each side)
- Resin center section: white frost
- Voice/adaptor kit to accept couplers and jacks
- One touch pivot open/close
- Four 10' power cords
- Housing: silver anodized aluminum

### How to Specify

- ① Model




Power/Data/Voice Accessories

Pricing

Undersurface Mount

GSA SIN 711-8  
† GSA Non-Contract

D	W	H	Model	Planning Factors	Price
<b>Mini-Tap® Power Unit</b>					
3¾"	3"	1¾"	KCE0303MTPPUSMB	Mount unit near the worksurface edge for easy access.	\$105
<b>Mini-Tap® Power/USB Unit</b>					
3¾"	3"	1¾"	KCE0303MTPUUSMB	Mount unit near the worksurface edge for easy access.	\$226
<b>Power Outlet Strip</b>					
1¾"	10½"	1½"	99KELPS †		\$76



Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

Standard Includes

Mini-Tap Power Unit

- Two receptacles
- Slide mounting hardware
- 6' black cord

Mini-Tap Power/USB Unit

- One receptacle
- Two USB ports
- Slide mounting hardware
- 6' black cord

Power Outlet Strip

- Six outlets
- 10' power cord

How to Specify

- ❗ Model

All electrical accessories are available for field installation only.


U.L. listed. Any field modification of the electrical components voids the U.L. listing. The customer is responsible for the proper application of products to the local codes under which installation must be made.

## Power/Data Drawer

## Pricing

GSA SIN 711-8

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



D	W*	H	For Use with**	Model	Price
<b>Power/Data Drawer</b>					
7¾"	27⅝"	2½"	36" tops	<b>99K26PDD</b>	\$113
7¾"	33⅝"	2½"	42" tops	<b>99K32PDD</b>	127
7¾"	39½"	2½"	48" tops	<b>99K38PDD</b>	140
7¾"	45½"	2½"	54" tops	<b>99K44PDD</b>	154
7¾"	51½"	2½"	60" tops	<b>99K50PDD</b>	168
7¾"	57½"	2½"	66" tops (shown)	<b>99K56PDD</b>	179
7¾"	63½"	2½"	72" tops	<b>99K62PDD</b>	205
7¾"	69½"	2½"	78" tops	<b>99K68PDD</b>	216
7¾"	75⅜"	2½"	84" tops	<b>99K74PDD</b>	230
7¾"	81⅜"	2½"	90" tops	<b>99K80PDD</b>	260
7¾"	87⅜"	2½"	96" tops	<b>99K86PDD</b>	290

\* Width includes drawer and mounting brackets.

\*\* For storage-supported tops, select the drawer width based on the open, unsupported kneespace.

Accepts Perks single-circuit and four-circuit (8-wire) electrical system.

For use with Priority™, Definition®, Fluent®, or Footprint® in open plan or freestanding applications.

➤ See the Priority chapter of the *Kimball Desks & Accessories Price List* for additional information pertaining to the use of power/data drawers with Priority worksurfaces.

Not intended for use with Cetra®, Xsite®, or Interworks® EQ panels.

### Standard Includes

- Cut-outs on bottom of drawer for power, data, flexchain, and power in-feeds
- Cut-outs on both sides (ends) of drawer for routing power to adjacent drawers
- Knockouts on front and back compatible with industry-standard data faceplates
- Holes in bottom of drawer for Perks laptop/equipment lock
- Attachment hardware

### How to Specify

- ① Model
- ② Finish color:
  - 405** = Designer White
  - 425** = Shadow
  - 462** = Cinder
  - 501** = Platinum Metallic (+10%)
  - 514** = Carbon Metallic (+10%)
  - 544** = Silver Pearl (+10%)






## Single-Circuit Power Components

Pricing

GSA SIN 711-8

Model	Description	Price
<b>Power In-Feed</b>		
99K210P1PF		\$229
<b>Duplex Receptacle</b>		
99K2P1RDS		\$71
<b>Jumper Cables</b>		
99K2P1J8	12"	\$79
99K2P1J4	24" (shown)	74
99K2P1J1	48"	95
99K2P1J5	74"	103
99K2P1J6	96"	157
99K2P1J7	120"	174
<b>Mini-Adapt Power Module</b>		
99K2P1PM2	2"H x 3 <sup>5</sup> / <sub>8</sub> "W x 2 <sup>5</sup> / <sub>8</sub> "D.	\$141

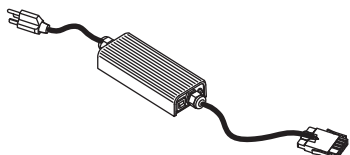

Mini-adapt power module features a clamp that hand-tightens to secure the module to the work surface.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Power In-Feed

- 10' black power cord with standard three-prong plug on one end and single squeeze-latch connector on the other end
- Smart box monitor

#### Duplex Receptacle

- Two three-prong outlets
- 12" modular feed with double-out interface

#### Jumper Cables

- Black cable with a squeeze-latch connector on each end

#### Mini-Adapt Power Module

- Two NEMA-rated 15-amp receptacles
- 18" modular feed with double-out interface; cord is black
- Housing: black textured finish

### How to Specify

- ① Model

## Four-Circuit (8-Wire) Power Components

Pricing

Power Entries

GSA SIN 711-8

Model	Planning Factors	Price
<b>Modular Power In-Feed</b>		
<i>Starter Plate</i>		
<b>99KP4WPSM</b>	Accepts modular power in-feed. 5 1/8" x 5 1/8".	\$113
<i>Power Harness</i>		
<b>99K10P4FPFM</b>	Must be used with modular starter.	\$293
<b>Floor/Wall Power In-Feed</b>		
<b>99K10P4FPF</b>		\$267
<b>Ceiling Power In-Feed</b>		
<b>99K12P4CPF</b>		\$236
<b>Power Entry for Use in New York City</b>		
<b>99KP4FPFNYC</b>		\$356
Related Products:		
<b>Power/Data Flexible Ceiling Pole</b>		
<b>99K10PDPC</b>	Used to conceal power in-feed and data cables	\$473
<b>Metal Ceiling Trim Plates (set of 2)</b>		
<b>99KPCTP</b>	Conceal intersection of the flexible ceiling pole at the worksurface and ceiling.	\$46

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Modular Power In-Feed Starter

- Black metal wall plate

#### Modular Power Harness

- 10' liquid tight conduit with a squeeze-latch connector on each end

#### Floor/Wall Power In-Feed

- 10' liquid tight conduit with a single squeeze-latch connector on one end and pigtail on the other

#### Ceiling Power In-Feed

- 12' galvanized metal conduit with a single squeeze-latch connector on one end and pigtail on the other

#### Power Entry for Use in NYC


- Modular floor/wall power in-feed
- Hardwire box
- 2' galvanized metal
- Cover plate

#### Flexible Ceiling Pole

- 10' flexible conduit: stainless steel

### How to Specify

- 1 Model

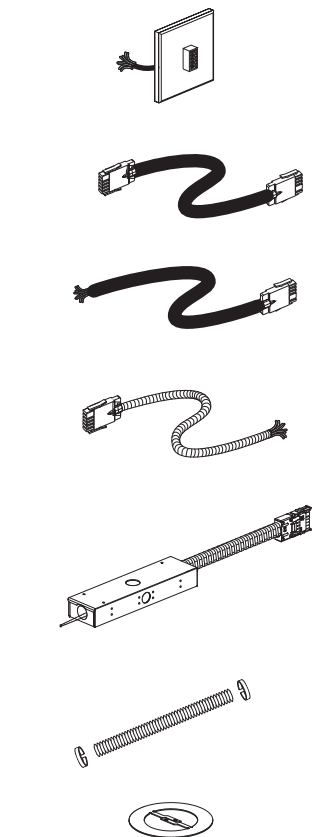

➤ See the appropriate price list for series-specific electrical planning guidelines for four-circuit configurations.



Four-circuit electrical power entries or modular starter must be installed by a licensed electrician.

## Four-Circuit (8-Wire) Power Components

Pricing

Modular Components

GSA SIN 711-8



Model	Description	Function	Price
-------	-------------	----------	-------

### Duplex Receptacles

#### For 3 + 1 Circuit Configuration

99KP4RD1	Circuit 1	Delivers power from circuit 1 with shared neutral and ground	\$95
99KP4RD2	Circuit 2	Delivers power from circuit 2 with shared neutral and ground	95
99KP4RD3	Circuit 3	Delivers power from circuit 3 with shared neutral and ground	95
99KP4RD4	Circuit 4 (dedicated)	Delivers power from dedicated circuit 4 with ded. neutral and ground	95

#### For 2 + 2 Circuit Configuration

99KP4RD1	Circuit 1	Delivers power from circuit 1 with shared neutral and ground	\$95
99KP4RD2	Circuit 2	Delivers power from circuit 2 with shared neutral and ground	95
99KP4RD4	Circuit 4 (designated)	Delivers power from designated circuit 4 with shared neutral and ground	95
99KP4RD5	Circuit 5 (designated)	Delivers power from designated circuit 5 with shared neutral and ground	95

### Power Distribution Assemblies

99K36P4D	36"W	\$189
----------	------	-------

### Jumper Cables

99KP4J4	24"W	\$157
99KP4J2	36"W	170
99KP4J1	48"W (shown)	189
99KP4J5	74"W	253
99KP4J6	90"W	301
99KP4J7	120"W	359

➤ See the appropriate price list for series-specific electrical planning guidelines for four-circuit configurations.

Four-circuit electrical power entries or modular starter must be installed by a licensed electrician.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Duplex Receptacles

- Two outlets black plastic housing
- Squeeze-latch connector on one end
- Housing: black plastic

#### Power Distribution Assembly

- Galvanized metal conduit with triple-out interface
- Accepts one or two receptacles

#### Jumper Cables

- Galvanized metal conduit
- Squeeze-latch connectors on both ends



### How to Specify

- 1 Model

## Hardwire Power Components

Pricing

GSA SIN 711-8



<i>Model</i>	<i>Function</i>	<i>Price</i>
<b>Hardwire Box</b>		
<b>99KPBH</b>	Accommodates junctions and receptacles	\$46
<b>Hardwire Covers</b>		
<b>99KPHCB</b>	Blank cover; use to protect the contents of the hardwire box	\$26
<b>99KPHCD</b>	Duplex cover plate provides an access hole, sized to fit Pass & Seymour 26242 series receptacles (or compatible size and type).	\$26
<b>Hardwire Box Template</b>		
<b>99KPHT</b>	Used for locating and drilling holes required to attach hardwire box to power/data tray.	\$26

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Hardwire Box

- Steel box

#### Hardwire Cover

- Cover: steel

### How to Specify

- ① Model

Hardwire components must be installed by a licensed electrician.

## LED Lights

## Pricing

GSA SIN 711-8  
† GSA Non-Contract

W	H	Base Diameter	Model	Price
<b>Freestanding</b>				
16 <sup>1</sup> / <sub>8</sub> "	15 <sup>15</sup> / <sub>16</sub> "	6 <sup>1</sup> / <sub>8</sub> "	KCUFSL †	\$269

<b>Surface Mount</b>				
37 <sup>3</sup> / <sub>16</sub> "	13 <sup>7</sup> / <sub>16</sub> "		KCUSML †	\$368

D	W	H	Model	Description	Price
<b>Standard Under Cabinet</b>					
1"	15 <sup>1</sup> / <sub>2</sub> "	1"	KCU16TLKL †	For use with 30"W or smaller units. 56 LED lights.	\$301
	23 <sup>3</sup> / <sub>4</sub> "	1"	KCU25TLKL	For use with 30"W units. 104 LED lights.	342
	30 <sup>1</sup> / <sub>2</sub> "	1"	KCU33TLKL	For use with 36"–54"W units. 132 LED lights.	434
	62"	1"	KCU63TLKL	For use with 72"–90"W units. 264 LED lights.	665

<b>Daisy-Chain Under Cabinet</b>					
<b>Starter Units</b>					
1"	15 <sup>1</sup> / <sub>2</sub> "	1"	KCU16TLKLGS	For use with 30"W or smaller units. 56 LED lights.	\$354
	23 <sup>3</sup> / <sub>4</sub> "		KCU25TLKLGS	For use with 30"W units. 104 LED lights.	402
	30 <sup>1</sup> / <sub>2</sub> "		KCU33TLKLGS	For use with 36"–66"W units. 132 LED lights.	507
<b>Add-On Units</b>					
1"	15 <sup>1</sup> / <sub>2</sub> "	1"	KCU16TLKLGA	For use with 30"W or smaller units. 56 LED lights.	245
	23 <sup>3</sup> / <sub>4</sub> "		KCU25TLKLGA	For use with 30"W units. 104 LED lights.	281
	30 <sup>1</sup> / <sub>2</sub> "		KCU33TLKLGA	For use with 36"–66"W units. 132 LED lights.	356

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

### Standard Includes

#### Freestanding and Surface Mount

- Power supply
- 6 foot cord

#### Under Cabinet

- Fixture: silver aluminum finish
- One toggle switch on 16", 24", and 30"W models; two toggle switches on 62"W model.
- Black power cord and power supply:
  - 6' cord and plug with built-in power supply on 16", 24", and 30"W standard models
  - Two-piece 12' cord with in-line power supply on 62"W standard model and all daisy chain starter units
- Two 6' interconnect cords and two jumper pins on daisy chain starter units
- Concealed magnet and wood screws
- Self-adhesive wire manager

### How to Specify

- 1 Model

## Task Lights

## Pricing

GSA SIN 711-8

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Standard Task Lights</b>				
4 $\frac{3}{8}$ "	23 $\frac{1}{4}$ "	1 $\frac{5}{16}$ "	<b>KCU25TL</b>	\$194
4 $\frac{3}{8}$ "	35"	1 $\frac{5}{16}$ "	<b>KCU37TL</b>	208
4 $\frac{3}{8}$ "	46 $\frac{7}{8}$ "	1 $\frac{5}{16}$ "	<b>KCU49TL</b>	219
<b>For Use in Chicago</b>				
4 $\frac{3}{8}$ "	23 $\frac{1}{4}$ "	1 $\frac{5}{16}$ "	<b>KCU25TLC</b>	\$280
4 $\frac{3}{8}$ "	35"	1 $\frac{5}{16}$ "	<b>KCU37TLC</b>	295
4 $\frac{3}{8}$ "	46 $\frac{7}{8}$ "	1 $\frac{5}{16}$ "	<b>KCU49TLC</b>	304

### Standard Includes

- Fixture: black
- T5 cool white single tube lamp:  
14 watt on 23"W light;  
21 watt on 35"W light;  
28 watt on 47"W light
- High-frequency electronic ballast
- Prismatic lens
- Rocker-type on/off switch in center
- 90° cord plug with southwest  
orientation prong configuration;  
Chicago unit features a fused plug
- 9' cord attached in center of fixture

### How to Specify

- 1 Model

All lighting components are U.L.  
approved.

Consult local codes for application  
restrictions.

For use on highback organizers and  
overhead storage.

Statement of Line	▶ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

▶ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for a complete overview of the Kimball materials program, including:

- Characteristics of wood
- Special wood finishes
- Customer-specified laminate (CSL)
- Customer-specified paint (CSP)
- Fabric application and colorways
- Customer's own material (COM) overview
- Alliance program
- TB133 process

## Wood

*Applies to:*

- Keyboard drawers
- Wood center drawers
- Visual boards

### Price Group 1

MC	Amber Cherry
CC	Cordoba Cherry
MH	Mocha Cherry
SC	Sedona Cherry
IM	Brighton Maple <sup>2</sup>
TM	Huntington Maple <sup>2</sup>
ES	Espresso Walnut
MW	Midtown Walnut
TW	Tribeca Walnut
UW	Urban Walnut
CO	Canyon Straight Grain
DF	Driftwood Straight Grain
YO	Monterey Straight Grain
NW	Tuscan Straight Grain
CX	Coco <sup>1,2</sup>
SX	Sienna <sup>1,2</sup>

### Price Group 2

CS	Coco Sapele <sup>2,3</sup>
SS	Sienna Sapele <sup>2,3</sup>
CZ	Clear Zebrawood <sup>2,3</sup>

<sup>1</sup> CX Coco and SX Sienna finishes coordinate with price group 2 finishes of the same name; no upcharge applies.

<sup>2</sup> Not available on visual boards with molding.

<sup>3</sup> Not available on keyboard drawers and wood center drawers.

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

➤ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for a complete overview of the Kimball materials program, including:

- Characteristics of wood
- Special wood finishes
- Customer-specified laminate (CSL)
- Customer-specified paint (CSP)
- Fabric application and colorways
- Customer's own material (COM) overview
- Alliance program
- TB133 process

IMPORTANT: Woodgrain laminate is a commercially compatible match to the wood finish of the same name and designator with consideration for the most common application—laminate surfaces on a wood chassis. When laminate and wood are mixed in other applications, the flip that occurs naturally in veneer may influence the overall match from piece to piece.

### TFL

*Applies to:*

- Surface dividers

#### Woodgrain

MC	Amber Cherry
MH	Mocha Cherry
IM	Brighton Maple
MW	Midtown Walnut
CO	Canyon Straight Grain
DF	Driftwood Straight Grain
YO	Monterey Straight Grain
NW	Tuscan Straight Grain

#### Solid

480	Antique White
462	Cinder
440	Cloud
405	Designer White
461	Graphite
420	Sandstone
460	Storm

### Writable Laminate

*Applies to:*

- Markerboards

#### Solid

409M	Icey White
483M	Off White



Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

➤ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for a complete overview of the Kimball materials program, including:

- Characteristics of wood
- Special wood finishes
- Customer-specified laminate (CSL)
- Customer-specified paint (CSP)
- Fabric application and colorways
- Customer's own material (COM) overview
- Alliance program
- TB133 process

IMPORTANT: Due to the reflective qualities of metallic paints, variations in color may occur.

## Paint

### Applies to:

- Metal work tools
- Organizational tools

*Note: Metal memo box, note poster and pencil tray are available in black only.*

### Price Group 1

480	Antique White
427	Barley
437	Cement
403	Chamois
462	Cinder
440	Cloud
485	Dark Chocolate
405	Designer White
453	Environmental Grey
459	Featherstone
450	Fog
488	Frosty White
461	Graphite
445	Moon Beam
416	Putty
420	Sandstone
425	Shadow
465	Smoke
460	Storm
429	Tantalum
419	Wallaby

### Price Group 21<sup>1</sup>

111	Apricot Orange
106	Cloud Blue
107	Dark Blue
113	Golden Rod
105	Spinach Green
112	Tango Red

<sup>1</sup> Group 21 solid colors are available on select metal work tools; see pricing pages.

### Price Group M

514	Carbon Metallic
507	Patina Metallic
501	Platinum Metallic
505	Satin Bronze Metallic
544	Silver Pearl
504	Taupe Metallic

### Applies to:

- Hanging file folders

### Price Group 1

480	Antique White
462	Cinder
405	Designer White

### Price Group M

514	Carbon Metallic
501	Platinum Metallic
544	Silver Pearl

### Applies to:

- Wire manager filler

### Price Group 1

480	Antique White
403	Chamois
462	Cinder
440	Cloud
485	Dark Chocolate
405	Designer White
450	Fog
488	Frosty White

### Price Group 1, continued

461	Graphite
420	Sandstone
425	Shadow
460	Storm

Statement of Line	➤ See page 4.2
Planning	4.12
Pricing	4.25
Surface Materials	4.67

➤ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for a complete overview of the Kimball materials program, including:

- Characteristics of wood
- Special wood finishes
- Customer-specified laminate (CSL)
- Customer-specified paint (CSP)
- Fabric application and colorways
- Customer's own material (COM) overview
- Alliance program
- TB133 process

## Kimball Panel Fabric

*Applies to:*

- Surface dividers
- Mobile screens
- Tackboards

➤ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for the most up-to-date list of available fabric patterns.

### Price Grade A

Compose  
Crossroads  
Fusion  
Meander  
Mykel  
Plinth  
Sprite  
Tapestry  
Universe

### Price Grade B

Basket  
Frenzied  
Fuse  
Linen  
Lyko  
Pact  
Prose  
Rivulet  
Savile  
Serengeti  
Tenor  
Thicket  
Woodland

### Price Grade C

No fabrics at this time.

### Price Grade D

No fabrics at this time.

### Price Grade E (graded-in)

Align (Carnegie)  
Circle Line (Knoll Textiles)  
Reflect (Knoll Textiles)

## Kimball Upholstery

*Applies to:*

- Surface dividers
- Mobile screens

➤ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for the most up-to-date list of available fabric patterns.

### Price Grade 1

Blink  
Disperse  
Input  
Moment  
Seasons  
Soundbyte

### Price Grade 2

Cadence  
Couture  
Mingle  
Parenthesis  
Phrase  
Reason  
Spectrum  
Twilight

### Price Grade 3

Bobby  
Graph  
Intuition

### Price Grade 4

Slice

### Price Grade 5

No fabrics at this time.

### Price Grade 6

Flock

IMPORTANT: If your COM is less than 66"W, some size restrictions may apply. Additional yardage may be required if patterns require matching.

## COM Yardage Requirements

<i>Model</i>	<i>66"W Directional</i>	<i>54"W Directional</i>	<i>66"W Non-Dir.</i>
<b>Mobile Screens</b>			
99K2468MSAF	1.9	1.9	1.5
99K3068MSAF	1.9	3.7	1.8
99K2468MSSF	1.9	1.9	1.5
99K3068MSSF	1.9	3.7	1.8

<i>Model</i>	<i>66"W Directional</i>	<i>54"W Directional</i>	<i>66"W Non-Dir.</i>
<b>Wall-Mounted Tackboards</b>			
99K3020TBW	0.9	0.9	0.9
99K3620TBW	0.9	0.9	0.9
99K4220TBW	0.9	0.9	0.9
99K4820TBW	0.9	0.9	0.9